




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>A01K 29/00</b>		<b>A1</b>	(11) International Publication Number: <b>WO 98/47351</b>
		(43) International Publication Date: 29 October 1998 (29.10.98)	
(21) International Application Number: PCT/US98/07916		(74) Agents: BRUHN, David, E. et al.; Dorsey & Whitney LLP, 220 South Sixth Street, Minneapolis, MN 55402-1498 (US).	
(22) International Filing Date: 17 April 1998 (17.04.98)		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(30) Priority Data: 08/843,541 18 April 1997 (18.04.97) US 60/051,465 1 July 1997 (01.07.97) US			
(63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application US Filed on Not furnished (CIP) Not furnished			
(71) Applicant (for all designated States except US): AVID IDENTIFICATION SYSTEMS, INC. [US/US]; Suite 5, 3179 Hamner Avenue, Norco, CA 91760 (US).		Published With international search report.	
(71)(72) Applicant and Inventor: HAYES, Norman, J. [US/US]; R.R. 1, Box 190, Columbus, MT 59019 (US).			
(72) Inventors; and (75) Inventors/Applicants (for US only): TROESCH, Peter [-/US]; 3179 Hamner Avenue, Norco, CA 91760 (US). LINSETH, Gerry, S. [-/US]; 3208 Park Drive, Rapid City, SD 57702 (US).			

(54) Title: ANIMAL HUSBANDRY SYSTEM

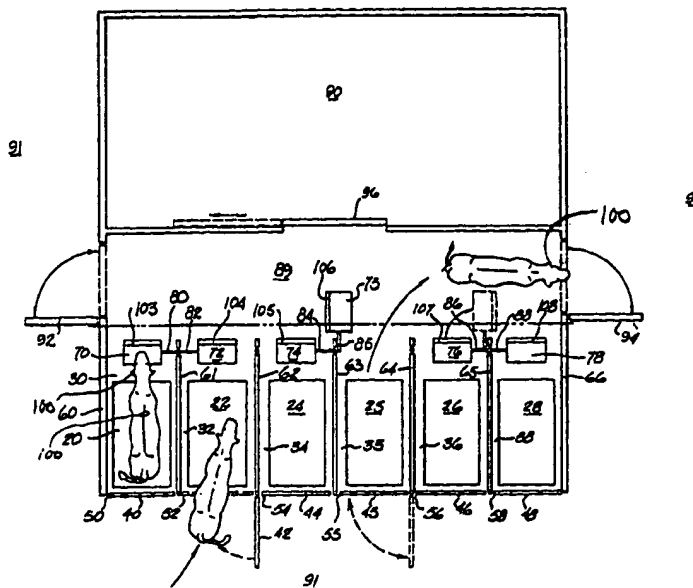

## (57) Abstract

An animal husbandry system comprising an electronic identification device (100) carried by an animal and a signal receiving device (105) generally adjacent to the animal whereby the electronic identification device (100) produces an identification signal including information about the animal and the signal receiving device (105) receives the signal thereby facilitating the care and management of the animal, wherein the electronic identification device (100) has magnetic properties and may be adapted to deliver a substance to the animal and may assist in determining feed conversion efficiency.

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

1     **TITLE: Animal Husbandry System**

        The present application is a continuation-in-part of copending U.S. patent application Serial No. 08/843,541, filed April 18, 1997, and claims the priority of U.S. provisional patent application Serial No. 60/051,465, filed July 1, 1997.

**BACKGROUND**

6             The present invention relates to animal husbandry and, more particularly, to a system for identifying animals, for obtaining, recording and monitoring information about animals, and using animal identification and information to enhance the treatment, care and management of animals.

                    In one embodiment, the invention comprises an internal electronic identification device  
11     with the capacity to deliver a substance to an animal. In another embodiment, the invention comprises the electronic identification device and a reader for receiving a signal from the device. In another embodiment, the invention comprises the electronic identification device with magnetic properties and a reader for receiving a signal from the device, wherein the electronic identification device may be adapted to dispense or provide a substance to the animal carrying  
16     the device over time or on command.

                    The present invention provides a system for identification and control of animal: which is adapted to utilize animal data such as identification and characteristics (such as weight, temperature, blood type, DNA and the like) in a manner enabling a farmer, dairy, milking parlor, rancher, feedlot operator or the like to more efficiently and profitably control and manage  
21     animals such as beef cattle, sheep and hogs.

                    In one embodiment, the present system comprises the use of a stall with an exit and an entrance whereby an animal, carrying an electronic identification device, enters the stall and is positioned adjacent to an electric signal generating and receiving device (a "receiver" or "reader") a reader. An entrance gate is automatically operable from a normally open position to a

1 closed position to confine the animal in the stall upon generation of a gate closing signal. An  
exit gate is automatically operable from a normally closed position to an open position upon  
receipt of a gate opening signal to provide an exit from the stall to one or more of another stall,  
an exitway, a retaining pen or feedlot adjacent the stall. In this manner, an individual animal of a  
group of animals may be identified and selectively directed for any of a variety of reasons.

6 The identification device facilitates selection or handling of particular animals, e.g., for  
further routing or for retention in a retaining pen. In one embodiment of the invention, which  
might be used with cattle or other ruminants in a feedlot or on a ranch or farm, the identification  
device comprises an ear tag which is attached to one ear of each animal. In another, preferred  
embodiment, the identification device comprises a bolus carried in one of the stomachs of the  
11 animal. In another embodiment, the identification device comprises an implant. In any of these  
embodiments, the electronic identification device is an electronic signaling device which is  
operable to generate a identification signal.

A computer or microprocessor may employed to determine and select which of the  
animals is to be directed to a selected location, e.g., the retaining pen or the group of animals  
16 outside the retaining pen, or to receive treatment. The signal generating and receiving device is  
suitably connected to the computer to communicate the animal identification signal to the  
computer which signal identifies a particular animal. The computer may be suitably  
programmed to receive and store specific information relating to each animal in association with  
that animals identification. In addition, the computer may be programmed to receive and store  
21 other information about the animals, environmental information and the like. The computer may  
be suitably programmed to compute and correlate specific information about a particular animal  
with general information or compilations of specific information about the animal to enable  
selection decisions to be made automatically about an animal. Selection decisions may also be  
made by a computer operator by manual entry of data to the computer . The computer may be

1 programmed to send animal selection signals to a gate operating associated with the entrance gate and the exit gate of each stall. Thus, when a selection signal is generated in the computer and transmitted to the gate operating when a particular selected animal is in a stall, the entrance gate is closed to hold the selected animal in the stall and the exit gate is opened to direct the selected animal to a location.

6 The animal husbandry system of the present invention may be used in conjunction with a multiplicity of animal management procedures. For example, the computer may be programmed to automatically generate a selection signal at the end of predetermined periods of time to enable the selected animal to receive medical treatment such as periodic inoculations, to receive a special feed ration, to be bred during a fertility period, to be isolated for calving, to be shipped to  
11 a feedlot, to be slaughtered or to be offered for sale or the like. Any of the foregoing decisions can be made separately from the computer and inputted by the computer operator. The time of day of watering of a particular animal and the amount of water drunk by the animal can be recorded in the computer. Irregularity of appearance or the failure of an animal to enter a stall for a period of time can be recorded in the computer. The computer can be programmed to generate  
16 period (daily, weekly, etc.) information sheets about each animal for the use of management personnel and to generate alarm signals relating to particular animals.

Another feature of the present invention may be the capability of measurement of a selected physical characteristic of a particular animal. For example, the weight of the animal may be measured while the animal is in a stall on platform-type scale or the like, and a weight  
21 signal may be generated and transmitted to the computer. Thus, the gain or loss of weight of each particular animal may be recorded on a daily basis and animal management decisions made automatically or manually by the computer. The electronic identification device may be adapted to sense and communicate animal characteristics such as temperature, blood type or genetic information.

1 Medicinal treatment may be effected when an animal is in a stall by direct injection or introduction of a medication or other substance into a feed and/or water container. In a preferred embodiment of the present invention, medication or other substances may be provided to the animal by using the bolus of the present invention, or an attachment thereto, whether or not the animal is in a stall or other locations such as pastures or pens.

6 Since the electronic identification device of the present invention is placed inside the reticulum of an animal, the temperature information provided by the associated thermometer will be accurate and will give early indication of any increase in temperature to indicate a fever. It will also indicate a decrease in temperature which aids in determining when an animal goes into estrus. Observation of temperature readings will aid in detecting the proper time for artificial  
11 insemination. The system of the present invention makes it possible to identify dairy or other cattle and take their temperature as they walk by a panel reader when they enter a milking parlor or any stall or chute. Feeder calves carrying the ID device of the present invention may be monitored for fever as they go through sales barns or enter a feedlot. Readers can be placed near drinking fountains or gates, stalls or chutes where daily, or more frequent, temperatures can be  
16 observed.

The system of the present invention is particularly useful for monitoring the condition of cattle in a feedlot environment where cattle are being fed and watered to increase weight to measure an animals performance for various genetic heritable characteristics such as rate of gain, feed conversion efficiency, quality and carcass cutability prior to slaughter. In operation of  
21 typical cattle feedlots, a multitude of animals are confined in one or more relatively large-size pens in which a supply of feed and water is provided. The present invention may be advantageously utilized by providing each animal with a bolus transponder. One or more of the signal generating and receiving devices may be adjacent to the animals, the food and/or water supply or other animal containment or handling structures. The computer may include a central

1 large-size computer located in a building structure at the feedlot and one or more small-size  
microprocessor-type computers located on site at the feedlot pen areas or hospital facilities.

Evidence indicates that cattle have definite patterns of growth and weight gain characteristics. Thus, it is possible to determine when it is no longer profitable to continue to hold and feed a particular animal in a feedlot environment. In addition, some cattle in a feedlot  
6 may also become ill and it is desirable to identify such animals for treatment and/or removal from the herd. It is to be understood that the advantages of this invention may be employed with all kinds of domestic and wildlife animals and may be used in other environments such as on farms, ranches and game preserves.

In one embodiment, the invention comprises one or more relatively large animal  
11 confinement structures for generally confining a large group of animals and one or more relatively smaller animal confinement structures within or associated with the large structure for selectively confining one or a smaller group of the animals selected from the larger group of the animals. Individual stalls may be provided for receiving one animal at a time and include an entrance and exit gate for restricting entry and exit of the animals relative to a stall. A feeding  
16 and/or watering bowl or trough, may be provided in such stalls for supplying feed and/or water to an animal located in the stall. A conventional electronic platform-type scale may be located in one or more of the stalls in a position and arrangement to weigh an animal while it is in the stall. An electronic identification device is carried by each animal for generating a unique coded identification signal for each animal in order to identify the particular one of the animals. A  
21 signal receiver is placed permanently or semi-permanently adjacent to the stall(s) for receiving the identification signal transmitted from the animal. The signal receiver may also transmit a corresponding process identifying signal unique to the particular one of the animals. A computer or microprocessor may be used for correlating the identification signal and the weight signal for each animal with predetermined weight criteria. If the weight of the animal meets predetermined

1 weight criteria, an electronic control signal is generated for selective separation of that animal from the other animals. Suitable chutes and gates may be associated with the animal confining structures for directing the animal to a selected location based on the animal's information. The gates may be operated electronically and automatically in response to signals generated by the microprocessor, electro mechanically by an operator or mechanically.

6 Advantages of the present invention, particularly the electronic identification bolus include permanent international individual identification for ruminant animals, lifetime temperature monitoring for such animals and, in one embodiment, a lifetime hardware control magnet incorporated in the device. With respect to use in feedlots, the permanent individual identification number is provided for each animal. This can prevent theft, and provide  
11 identification if theft does occur, and provide source information and history for the lifetime of the animal. In one embodiment, with automatic animal management and health control provided, along with the systemic gate and chute controls, the present invention facilitates management of animals in a feedlot setting. It allows cattle feeders to track growth curves and identify optimum end point feeding for each animal, in any size group of animals, as well as to  
16 sort at any given time and day. The present invention facilitates identification and sorting of sick cattle, and it can be used to facilitate and identify individual weight gain on each animal and growth weight gained per pound on a daily basis. It permits the identification of feed conversion efficiency and ration adjustments and it also may be used to monitor water consumption.

In one embodiment of the present invention, it is anticipated that there may be a complete  
21 computerized accessible number bank for identifying all cattle world-wide, as well as for providing information about individual animal's ownership, source information and history for the lifetime of an animal. This would be advantageous for maintaining health and safety records, and to facilitate the identification of both live animals and carcasses for food safety regulations through-out the world for disease trace-back as required by individual countries.



1           An advantage of the present invention for breeders is that it provides permanent recorded identification on each animal, as well as estrus cycle identification and automatic sorting for A.I. estrus purposes for both beef and dairy cattle. The present invention may be utilized to provide data for calving, weaning, performance testing, marketing, feeding and carcass information. Temperature monitoring is an advantage of the present invention and can be used to assess all  
6           phases of an animal's life and provides indication of health. An advantage of the magnetic feature of the preferred embodiment of the present invention is that it eliminates hardware disease and permits the introduction of satellite delivery systems for delivering substances to an animal. Another advantage is that it enhances signal transmission.

          Preferably, the bolus of the invention may be adapted to include sensors to measure acids  
11           in the stomach of an animal, including pH and propionic acids in the rumen. In one embodiment the bolus may include a timer device to identify the time of use in an animal, and a delivery system for meeting all forms of oral needs.

          Other features and advantages of the present invention will become more fully apparent and understood with reference to the following specification and to the appended drawings and  
16           claims.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

Figure 1 is a schematic plan view of one illustrative arrangement of apparatus for practicing the method of the invention.

Figure 2 is an enlarged schematic side elevational view of a portion of the apparatus of Figure 1.

21           Figure 3 is an enlarged cross-sectional side view of one embodiment of the electronic identification device of the present invention.

Figure 4 depicts another embodiment of the electronic identification device of the present invention..

1     Figure 5 depicts the device of Figure 4 partially cutaway with the bolus of the invention enclosed in a resilient housing.

Figure 6 depicts a block diagram of one embodiment of the invention.

Figure 7 is a schematic block diagram of one embodiment of the apparatus and associated electronic control system components.

6     Figure 8 is a schematic plan view of another animal husbandry system for practicing the invention.

Figure 9 is an enlarged schematic side view of a portion of the system of Figure 8.

Figure 10 is an enlarged schematic plan view of a portion of the apparatus of Figure 9.

11     Figure 11 is a schematic plan view of the stall apparatus of Figure 10 and associated identification and control apparatus.

Figure 12 is a schematic plan view of another illustrative arrangement of apparatus for practicing the invention.

Figure 13 is a schematic view of another illustrative arrangement of apparatus for practicing the invention.

16     Figure 14 is a schematic plan view of another illustrative arrangement of apparatus for practicing the invention.

Figure 15 is a schematic plan view of another illustrative arrangement of apparatus for practicing the invention.

21     Figure 16 depicts another embodiment of the present invention, namely, an artificial insemination apron for use with the bolus.

Figure 17 depicts the embodiment of Figure 16 in use.

Figure 18 depicts another embodiment of the bolus of the present invention, wherein the bolus is adapted to carry one or more of the depicted satellite delivery devices.

Figure 19 is a cross-sectional side view of a transponder according to the present invention.

1 Figure 20 is an end view of the transponder of Figure 19.

### **DETAILED DESCRIPTION**

With regard to means for fastening, mounting, attaching or connecting any components of the present invention to form the system or any embodiment as a whole, unless specifically described as otherwise, such means are intended to encompass conventional fasteners such as machine screws, rivets, nuts and bolts, toggles, pins and the like. Other fastening or attachment means appropriate for connecting components include adhesives, welding and soldering, the latter particularly with regard to the electrical system of the apparatus.

The electrical components of the present invention are conventional, commercially available components unless otherwise indicated, including electrical components and circuitry, wires, fuses, soldered connections, chips, boards and control system components.

Generally, unless specifically otherwise disclosed or taught, the materials for making the various components of the present invention are selected from appropriate materials such as metal, metallic alloys, ceramics, plastics, fiberglass and the like.

The present invention comprises an animal husbandry system comprising an electronic identification device (which also may be referred to as an "EID device") carried by an animal and a signal receiver (which also may be referred to as a "reader") generally adjacent to the animal whereby the electronic identification device produces an identification signal including information about the animal and the signal receiving device receives the signal thereby facilitating the care and management of the animal.

#### **EID device**

Referring to Figures 4, 5 and 6, in one embodiment, the electronic identification device of the present invention 10 comprises a read/write scanner 12 of the type DAS-5004 manufactured by BioMedic Data Systems, Inc. of Seaford, Delaware or an equivalent thereto such as the scanners manufactured and sold by Avid Identification Systems, Inc. of Norco, California,

1 suitable for the purpose intended, namely, to read or write into memories carried by a  
transponder. The read/write scanner 12 transmits a signal to a transponder 14 located remote  
from the read/write scanner as for example a transponder placed in a ruminants animal. The  
transponder 14 may be of the type IPTT, also manufactured by BioMedic or Avid or an  
equivalent thereto suitable for the purpose intended. Attached to the transponder for reading by  
6 the read/write scanner 12 are a plurality of both read only (16-16N, 18-18N) and  
programmable/read memories (20-20N). Any number or capacity of read only or  
programmable/read memories may be provided.

Memories contained on the transponder chip providing useful data may be monitored by  
the read/write scanner 12 using read only preprogrammed memories, as for example, animal  
11 identification 18 and other data on memories 18-18N to be monitored only and unprogrammable  
during the life of the animal. Programmable/readable memories 20-20N, such as one containing  
a running log of animal medical history which can be updated periodically with current medical  
information or any other important information during the life of the animal. With this medical  
and other important information being burnt in and nonerasable external of the animal.

16 It should be understood that redundant information can be stored in like chips 18 and 20  
or the additional chips 18A-18N and 20A-20N can be used as spares for later determined vital  
information on the animal.

The transponder chip is attached by any suitable means, such as by way of example, an  
adhesive such as epoxy or the like to the outer surface of a coated ferrite member 22 which may  
21 be a magnet such as a rectilinear block magnet or the like obtainable from Power Magnets, USA.  
The member 22 should have sufficient weight to remain in the animal throughout its life and be  
reusable. Preferably, the weight of the magnetic bolus is in the range of 2 to 6 ounces.

A wire antenna 26 of a suitable conductor is connected to the input/output of the  
transponder 14 by wrapping several turns around the member 22 over the transponder and chips

1 all being fixedly in place on the member 22. The antenna is likewise affixed to the member 22  
by suitable means as noted above. Preferably, the field of a magnetic member 22 will be normal  
to the field developed in the winding 26. Thus, the permanent magnet can be used as the  
magnetically permeable core of the antenna winding 26 acting as an inductor. It has been found  
that random wrapping of the antenna about the member 22 successfully operates but under  
6 certain conditions may require increased power transmission from the reader/programmer. It has  
been also found that as the animal in which the bolus is placed ingests metal objects through its  
life that the operation of the device may improve due to the magnetically attached metal objects  
increasing the antenna efficiency, thereby enhancing the receiving and delivery of electronic data.

The entire device can then be inserted into a length of shrink tubing 28 or the like with  
11 the ends sealed and the tubing shrunk around the complete bolus and electronics. The shrink  
tubing or the like should be of sufficient thickness to withstand an animal bite when being  
initially placed in the animal without causing damage to the windings, transponder(s) or micro  
chips.

It should be understood that the transponder chip and the specific memories implanted  
16 therein are state of the art small micro-circuitry.

Figures 1, 2 and 3 depict an ear tag electronic identification device 100. The tag member  
120 is made of one piece of molded flexible plastic material and a retaining button member 122  
made of one piece of relatively rigid molded plastic material. Tag member 120 has a relatively  
large body portion 124, an intermediate tapered portion 126, a support strap portion 128 and a  
21 retaining head portion 130. Retaining button member 122 has a central slot 132 and resilient  
spring finger portions 134, 136. In use, a slit 138 is cut in the top of the animal ear and head  
portion 130 is forced through the slit and then through the central slot 132 in button member 122.  
Thereafter, the head portion is retained by the button member to hold the tag member in the  
illustrated position hanging downward in front of the animal ear. Signal transmitter 102 is

1 suitably fixedly mounted on tag portion 126 by integral molding there within or placement in a  
pouch 136, Figure 3. After slaughter of an animal, the identification tag assembly may be  
removed from the ear and kept on or with the carcass to enable automatic monitoring of a  
particular animal and generation and storage of grade and quality information. Other types of ear  
tag assemblies may be utilized such as those described in U.S. Patents 3,896,577, 3,958,353 and  
6 4,102,073 or one piece plastic tags.

The identification signal generator 102 on the ear tag 100 is a conventional electronic  
chip device with conventional miniaturized electronic circuitry and an antenna which is capable  
of receiving activating electromagnetic energy and responding thereto by emitting a coded radio  
frequency digital signal. Such may be of the general design as apparatus currently manufactured  
11 and sold by B.I. Corporation of Boulder, Colo., and disclosed in U.S. Patent 4,475,481, the  
disclosure of which is incorporated herein by reference. Other designs may be used including the  
type wherein the identification device is battery operated and does not depend on receipt of  
activating energy from the signal receiver. Preferably, the animal electronic identification signal  
transmitting device of the present invention is a passive (no battery) electronic device, which  
16 may be encased or encapsulated in a suitable material resistant to gastric liquid (e.g., suitable  
plastics) that receives and stores energy from a surrounding receiving electromagnetic field  
generated by the reader (described below) and transmits an unique digital code to the reader. In  
the tag embodiment, the transmitter 102 is of relatively small size, e.g., approximately 15 to 25  
mm×15 to 25 mm× 3 to 5 mm, or less, and of relatively low weight, e.g., 5 to 10 grams. The  
21 range of transmission of both the transmitter and the receiver is approximately between six  
inches to four feet, and the storage capacity is approximately at least twenty to thirty binary digits  
(bits) of data plus other digits for preamble and parity (error detection) so that the system allows  
for up to 1,000,000 or more different unique codes which may be programmed into the electronic  
chip during manufacture. Both the transmitter and the receivers are adapted to operate under

1 severe environmental conditions, e.g., temperatures from -30° C to + 55° C, 10% to 100% relative humidity or sprayed or condensed water. The operating frequency may be between 100 KHz and 500 KHz, however, operating frequencies up to 100 MHz may be utilized by equivalent systems.

6 In one alternative embodiment of the electronic bolus of the present invention, an outside antenna wrap of a different configuration and/or length may be used to adjust the reading distance, for example, obtain a greater reading distance from a chip attached to the bolus. In this embodiment, the wrap may be on a bolus of ferrous or either magnetic, non-ferrous material.

The shape of the bolus may be changed, for example to an octagonal shape, with an index hole (not shown) for manufacturing purposes. The octagonal shape may facilitate better retention in any animal including straight-gutted animals, such as hogs, etc. Advantageously, the antenna wrap around an octagonal shape would be symmetrical and the directional orientation for reading would be optimized, possibly increasing the reading distance further.

Figure 18 depicts another embodiment of the magnetic bolus of the present invention wherein the body of the bolus 400 includes one or more satellite anchoring or receiving places 16 403, for example, relieved areas 403, for receiving satellite carriers 404 in various shapes. These satellite carriers 404 may be formed of a material to be dispensed 405 wherein the material is placed around an embedded magnetically susceptible metal core 406. The metal cores 406 can be loaded with virtually any compound or substance to be ingested by the animal. Because the cores 406 are magnetically susceptible they will be attracted to the magnetic bolus and attach 21 themselves to the same. The satellites 404 may be the carriers for substances such as growth hormones (BGH or the like) for release into the animal's system over time. Timed release may be provided by a satellite carrier with a permeable or semi-permeable exterior membrane around a material to be released (which may be in solid or gel form) or a dissolvable membrane for releasing the substance inside over a period of time. The satellite carriers 404 may be formed of

1 magnetically susceptible metal or include portions which are more or less susceptible to stomach  
acids and dissolve to provide timed release as well. The satellite carriers 404, or the bolus body,  
may be provided with a magnetically or electronically controlled valve (not shown) that may be  
actuated from an outside power and frequency source to open, thereby automatically releasing a  
vaccine or medication on demand. This would eliminate the need to manually run calves and  
6 cows through a manual working chute for vaccine injection.

One form of time in animal indicator may be to provide the bolus with a hole or a strip  
containing a material which would change color with time or erode due to stomach acids. This  
feature would provide a time indicator for use in the case where a second bolus is inserted into  
the animal at a later date.

11 Fig. 19 depicts a cross-sectional side view of a transponder 500 according to the present  
invention, and Fig. 20 depicts an end view of the transponder 500 of Fig. 19. The transponder  
500 includes the integrated circuit 502 mounted on a circuit board 504 together with a capacitor  
506. It should be noted, however, that the integrated circuit 502 may include in its design the  
capacitor 506. The integrated circuit 502 and capacitor 506 are affixed to posts 508 and to the  
16 end of a core 510, preferably formed from a ferrite material. At the time of assembly and  
introduction of the transponder into the ruminant animal, the core 510 may not be magnetized or  
magnetically biased.

As shown in Fig. 19, a coil 512 is helically wrapped about a plastic bobbin 514 having an  
internal dimension sized to fit over the outer dimension of the core 510. The ends of the coil 512  
21 are connected respectively to the posts 508 extending from the bobbin 514 to the circuit board  
504. Thus, the length of the wire forming the coil 512 is fixed as being an integer number of  
turns around the circumference of the bobbin 514 plus (or minus) the distance between the posts  
508. The length of the wire of the coil, the wire diameter and electrical properties and the number



1 of turns around the circumference of the bobbin 514 are all determinant of the inductance of the coil 512.

The positional location of the coil 512 and bobbin 514 about the core 510 is critical to operation of the transponder 500. The transponder 500 requires a tuned coil 512 and capacitor 506 combination. Generally, this is accomplished by matching the inductance of the coil 512 to the capacitance of capacitor 506. However, when the coil 512 has to be wrapped around the bobbin 514 and placed on the core 510, the positioning of the coil 512 on the core 510 will effect the inductance of the coil 512. Thus, the position of the coil 512 must be controlled so as to allow matching of the inductance of the coil 512 to the capacitance of the capacitor 506 in order to tune the circuit of the transponder 500. If the transponder 500 is not properly tuned, the reading and data transfer capabilities of the transponder are negatively impacted.

It has been found that by the selective placement of the core 510 within the coil 512, the responder 500 can be tuned at the time of assembly, even without optimizing the inductance of the coil 512, as the inductance of the coil 512 changes by varying the placement of the core 510. For a given set of design parameters for a core 510, including its circumference and length, the length of the wire of the coil 512 and the capacitance of the capacitor 506, by moving the coil 512 axially along the long axis of the core 510 until a tuned inductor/capacitance system is established and then securing the manufacturing process, for example by the use of a bonding agent or glue (not shown), a tuned transponder 500 can be assembled. Thus, once the preferred position of the coil 506 on the core 510 is established for a given set of design parameters, turned transponders 500 can be repetitively manufactured using identical components by the uniform placement of the coil 506 on the core 510.

### Reader

Referring back to Figures 1 and 2, the identification signal generator and receiver (the "reader") 103 is an electronic device mounted on or adjacent to the stall. It transmits

1 electromagnetic energy which powers the selected EID device and receives the radio frequency  
digital encoded signal therefrom. The reader may condition the identification signal for  
transmission to a process control microprocessor and may include an interface for connection to  
a scale or circuitry to condition scale output signal for transmission to the microprocessor. The  
reader 103 may be further constructed and arranged to receive a command from the  
6 microprocessor to sort the animal and to send a signal to a control interface which may be  
integrated for actuating the gate mechanisms and or medicating the animal. The reader 103 may  
be provided with the capability of detecting when an animal is drinking and being weighed, but  
not transmitting an identification code, a condition that indicates a malfunction in the electronic  
identification device 100 or a lost device, so that the animal may be sorted and/or an alarm  
11 message may be sent to the microprocessor. Preferably, the reader is packaged in a waterproof,  
sealed plastic or stainless steel case and is operable by 110 volts A.C., one amp capacity. The  
range is such as to activate and read the electronic identification device 100 between  
approximately 6 inches to 3 feet, so long as not to activate nor read the electronic identification  
device of an adjacent.

1

**In Use**

One illustrative embodiment of the system is depicted in Figure 1. The depicted system comprises an internal electronic identification device 100, such as the bolus of the present invention, carried by the animal(s).

6       The system further comprises a plurality of platform type electronic weighing scales 20, 22, 24, 25, 26, 28 located in separate stall spaces 30, 32, 34, 35, 36, 38 having automatic electronically operable and closeable entry gates 40, 42, 44, 45, 46, 48 for entrance openings 50, 52, 54, 55, 56, 58 at the entry end of each of the stall spaces which are defined by spaced parallel sidewall or rails 60, 61, 62, 63, 64, 65, 66. A feed and/or water bowl 70, 72, 74, 75, 76, 78 may be  
11       mounted at the exit end of each stall on automatic electronically operable openable and closeable exit gate 80, 82, 84, 85, 86, 88. The entry gates 40-48 are normally open, as indicated by gate 42, and the exit gates 80-88 are normally closed. In stalls without a feed and/or water bowl, the animal may be driven into the stall. After an animal enters a stall and is in the position shown in stall 30, the associated one of the entry gates may be closed, and the reader 105 actuated, either  
16       manually triggered or automatically triggered, to actuate the bolus 100 and, in turn, read the signal transmitted by the bolus 100.

Referring to Figure 1, readers 103, 104, 105, 106, 107, 108 may be mounted in or adjacent to each stall or feed/water bowl so that when an animal is in proximity thereto, such as when feeding or drinking therefrom, a unique coded identification signal is generated by the  
21       bolus 100 which identifies the animal in the associated stall. Each of the readers 103 are connected by suitable cables to a power supply and associated electronic data processing apparatus as hereinafter described.

After an animal in a stall has been identified and information about that animal has been gathered or communicated, the associated one of the exit gates 80-88 is opened as shown by gate

1 85 to enable the animal to exit the stall. An exitway or pen area 89 is located opposite the stall  
exits. Selectively openable and closeable control gates 92, 94, 96 may be used to direct a selected  
animal or animals to a holding pen 90 while other animals are directed back into the general herd  
population kept in an enclosed feedlot or pasture area 91.

Referring to Figure 2, the construction and arrangement of the stall may be such that the  
6 animal must stand on an associated scale 20 while the animal is in the stall. Furthermore, the size  
of the stall is approximately equal to the size of the animals so that freedom of movement of an  
animal is restricted after the animal enters the stall whereupon an entry gate control signal may  
be generated to cause the associated one of gates 40-48 to move to the closed position. In  
another embodiment of the invention, the animal may enter and exit the stall through the same  
11 entryway until a select signal has been generated. After the animal is in position in the stall and  
the identification signal has been generated by the associated one of the signal receiver 103-108,  
a weight signal is generated by the associated scale 20-28 and electronically processed in  
conjunction with the unique coded identification signal of the particular animal. After a  
predetermined time sufficient to enable the animal to finish drinking from the bowl or upon  
16 occurrence of a predetermined condition relating to the amount of water in the bowl, an  
electronic control signal is generated to cause the associated exit gate 80-88 to be moved to the  
gate open position whereupon the animal will move into the control chute or pen 89. If the  
animal exiting the stall is to be returned to the general herd population, return gates 92, 94 are  
opened and retaining gate 96 is closed. If the animal is to be separated from the general herd  
21 population, the return gates 92, 94 are closed and the retaining gate 96 are opened to provide an  
exit path enabling the animal to only enter the retaining pen 90. After the animal exits the stall,  
the stall exit gate is closed and the stall entrance gate is opened to enable another animal to enter  
the stall. The bowl may be kept full of water automatically by suitable float valve (not shown)  
connected to a supply of water through a suitable hose 114 (not shown) or the bowl may be

1 supplied with a feed ration through suitable overhead conveyor 115 (Figure 2) and associated  
feed ration dispenser 116.

An exemplary data processing and control system is shown in Figure 7, and includes a  
central computer 140 which is capable of receiving electronic animal identification signals and  
animal weight signals; storing and comparing animal identification, weight and other animal  
6 related information; and receiving and generating appropriate system control signals. The  
computer 140 may be located in a building or other environmentally controlled structure and may  
be connected to one or more multiple-stall feed-watering-weighing stations as well as to other  
data processing and storage devices 142. Each multiple-stall feed-watering-weighing station,  
such as the one shown in Figure 1, may include a process control microprocessor unit 144 for  
11 receiving animal identification signals from the identification device 103–108 associated with  
each stall through an interface 146 and weight signals from the scale 20–28 associated with each  
stall through an interface 148. The microprocessor unit may be used to store and/or record the  
identification number and the weight of the individual animals and transmit the information to  
the computer which is connected to the microprocessor unit through a central control 149 to  
16 receive and send information and control signals there between. Each of the gates is operable by  
a gate actuator 150, 152, 154, 156, 158 in response to control signals received through control  
interface 160, 162, 164, 166 from process control microprocessor 144. In addition, any auxiliary  
mechanisms such as feed or medicine dispensers are operable by an actuator 168, 170 in  
response to control signals received from process control microprocessor 144. It is to be  
21 understood that various control and data processing apparatus, including related circuitry and  
software, may be modified and varied as necessary or desirable to achieve the desired results or  
variations thereof.

In the exemplary data processing and control system, analog signals representative of  
animal weight are transmitted from conventional electronic scale 20 to interface 148 for

1 conversion into a digital weight signal representing the weight of the animal. The digital weight  
signals are transmitted from interface 148 to process control microprocessor 144 for transmission  
to the computer 140 through central control 149. The process control microprocessor may  
receive and store identification and weight data for a period of time and then transfer the data to  
the computer via the central control unit which converts the data signals to a high level protocol  
6 suitable for communication with the computer.

The system may be arranged so that an animal is not separated from the general herd  
population until after a sufficient period of time to enable processing of the last recorded weight  
data. For example, the weight data obtained during the confinement of an animal in a stall may  
be stored by the process control microprocessor or the central control for a period of time, e.g., 6  
11 to 12 hours, before being transmitted to the computer. In this situation, the animal is allowed to  
return to the general herd population after an identification and weighing process is completed.  
After the prior acquired weight and identification information is transmitted to the computer ,  
and appropriate calculations and comparisons have been made by the computer, the computer  
transmits an animal hold signal to the process control microprocessor which may be stored in the  
16 microprocessor. Then, the next time the animal enters a stall and is identified, the prior generated  
animal hold signal will become effective to initiate the separation process for that particular  
animal.

The system may include micro switches and/or photoelectric eyes associated with the  
various entrance and exit gates to indicate the passage of animals and closing or opening of the  
21 gates. Displays and printouts associated with the computer or the process control microprocessor  
may provide operators with specific information about specific animals which have been  
separated from the general herd population as well as specific information about specific animals  
still in the general herd population.

1           The microprocessor 144 is a microprocessor-based electronic device that contains the circuitry and memory to communicate with the identification device and scale and store one weight for each animal for each stall confinement for one period of time. The weight recorded may be the beginning, ending or average weight recorded. In addition, recorded information may include medical history, and/or management and performance history. The microprocessor  
6           also communicates with the computer via the central control as programmed or as requested, and is able to download all data records to the computer. In addition, the computer 140 is able to send data to the microprocessor 144 to update the animal records or to instruct it to initiate animal separation via the identification device.

          The microprocessor 144 may have the added functions of being a local monitor of each  
11          group of stalls by inclusion of a keyboard and display allowing the operator to gain access to and add data stored in the microprocessor at the stall site. Such data could include the weight of each animal, the date each animal was put into the pen, the total number of animals in the pen, and a list of the animals sorted for yesterday or so far today and the reason for the sort. The microprocessor may also provide a report of exception animals, indicating animals that should be  
16          in the pen but are not being identified. Such a report would help the operator locate animals with lost or defective electronic identification devices.

          The microprocessor 144 may also perform fault detection of the system in the stall area by receiving information on non-operating scales, an animal being weighed but not identified indicating a lost or malfunctioning tag transmitter and malfunctioning of the identification  
21          device. If any malfunctions occur, a light on the microprocessor will be lit. When an operator checks the microprocessor, he can, via the keyboard, request that the malfunction conditions be displayed. He can then take appropriate action to correct the reported malfunction. In addition, the microprocessor will transfer all such information to the central control or the computer to provide for central monitoring of malfunctions. The microprocessor may be packaged in a

1 stainless steel or other non-corroding weather tight sealed enclosure and/or placed in a building  
structure. The electronic components are conformal coated and all electrical connections to  
power or communication cables are through sealed conduit connections. The microprocessor 144  
may have an externally accessible sealed membrane-type keyboard and be operable at 110 volts  
A.C., five amp capacity, through a fused switch box with suitable filters to suppress line noise  
6 and transients. Such a microprocessor will poll the status of all weigh/identification stations in  
less than two seconds. If a sort status exists for an animal, the sort sequence will be actuated on  
a second poll so that the animal sort will begin no more than four seconds after the animal is  
identified as being at the station. The microprocessor should be designed to operate during very  
low and very high ambient temperatures. Heaters, internal to the enclosure, may be provided to  
11 maintain suitable temperature for the electronic components and sealed to prevent ingress of  
moisture so that operation will not be affected by rainfall, spraying or continued exposure to  
relatively high humidity.

The central control 149 serves as an interface between the control microprocessor 144  
and the central computer 140. The central control 149 accepts communication signals from the  
16 central computer and converts the data format into one suitable for transmission over the  
communication lines to the microprocessor. Signals coming to the central computer 140 from the  
microprocessor units are received by the central control and are converted to signals the central  
computer can accept. The central control also buffers signals from the microprocessor units by  
insuring the central computer is on line and ready to receive before allowing data to be  
21 transmitted. The central control will communicate to the microprocessor units in such a way that  
the data traffic on the communication lines is managed and microprocessor communications do  
not interfere with one another. The central control provides filtering so that noise or power spikes  
coming in on the communication lines are not transmitted to the central computer. The central  
control may also serve as a local system monitor. If communication is lost with any



1 microprocessor unit, it will light an alarm light and the display will indicate the nature of the malfunction. The status of each microprocessor and all data available at the microprocessor can also be requested and viewed at the central computer. The central control unit may be packaged in a shielded plastic computer terminal box, have a sealed membrane keyboard, and be operable by 110 volts A.C. with a dedicated 15 amp circuit with a capacity for controlling from one to five  
6 hundred microprocessor control units to provide a relatively large total system capacity, e.g., 300,000 or more animals.

The control interface, which may be integrated into the identification unit, is an electronic device that receives a signal when a sort of an animal being weighed is to occur. When this signal is received, the control interface switches power to an actuator, whether electrical, air or  
11 hydraulic, and starts the sort sequence. The control interface also monitors switches or other feedback mechanisms on the mechanical hardware to detect and signal the microprocessor when jamming or malfunctions occur.

The central computer 140 is preferably a hard disc, real time, multi-tasking computer with suitable software for two-way communication with the central control and proper data  
16 transfer there between.

It is an advantage of the system of the present invention that all useful information about an animal may be recorded and entered into the central computer in association with a particular unique code. Such information may include age, breed, initial weight, general health, source, and date of entry into the feedlot. In addition, the central computer may be provided with  
21 suitable data bases indicating average weight increase, maximum expected weight increase and length of time and amount and cost of feed for weight increase for animals of particular age, condition, breed, physical profile measurements, etc. Thus, the computer can be programmed to select a particular animal for slaughter or for resale at the most appropriate and profitable time. As weight information is generated during the feedlot feeding process, the information may be

1 continuously stored in the computer and used to generate data showing such matters as total weight increase, daily weight increase and the like. Such data can be compared and correlated with standard models included in the computer data base. The selection of animals may be controlled automatically by computer generated information or by review of the information by an operator.

6           Figures 8-11 show an embodiment of the invention wherein separate groups 200, 202, 204, 206, 208, 209 of stalls 210, 211, 212, 213, 214, 215, 216, 217 are separately located in large-size fenced feedlot-type pens 220, 221, 222, 223, 224, 225 which may be arranged in parallel rows with a central passageway 226 there between. Each group of stalls is spaced from a section of fence 227 of the associated pen to provide a retaining pen 228 defined by fence  
11 sections 229, 230 while also providing passageways 231, 232 connected to central passageway 226 by suitable gates 233, 234. Each retaining pen 228 is connected to central passageway 226 by suitable gate 235.

As shown in Figure 8, each group 200 of stalls is constructed and arranged in adjacent stall pairs 210 & 211, 212 & 213, 214 & 215, 216 & 217. Each stall of a pair of stalls has an  
16 entryway 240, 241 with an associated entrance gate 242, 243, an exitway 244, 245 with an associated exit gate 246, 247, a platform type scale 248, 249, and a water bowl 250, 251 reachable by an animal only from within the stall. Entrance gates 242, 243 are normally open so that cattle may freely enter any one of the stalls to obtain water from the associated watering bowl 250, 251 which may be the only source of water in the pen 220. In order to obtain water,  
21 each animal must fully enter one of the stalls and stand on the associated scale 248, 249. Exit gates 244 & 245 are normally closed so that each animal must back out of the stall after drinking water therein. When an animal has been selected for separation from the general herd population in main pen 220 and after the selected animal enters a stall, the associated entrance gate is closed and the associated exit gate is opened whereby the only exit from the stall is into the retaining

1 pen 228. After the selected animal exits the stall into the retaining pen, the associated entrance gate is opened and the associated exit gate is closed. Fence sections 255, 256 close off spaces adjacent the stalls so that the selected animals cannot escape from retaining pen 228 except through gate 235 which is normally closed until selectively opened by a feedlot operator for the purpose of removing a particular animal or group of animals.

6 A presently preferred construction for the stall comprises a relatively long length fixed common dividing wall 260, Figure 6, and relatively short-length fixed opposite side wall 261, 262, made from a length of metallic pipe material or the like with leg portions 264, 265 (Figure 10) fixedly embedded in a concrete pad 266 alongside of the scale. Each entry gate 243 comprises a length of pipe or the like bent into a curved U-shape configuration with end portions 11 267 pivotally mounted on side rail pipe 261, 262 by suitable bracket 268 for movement from a vertical position to a generally horizontal position as shown in Figure 10. An exit gate actuator 269 and control 270 are suitably mounted on rail 262. Each gate may comprise a U-shape pipe frame 272 pivotally mounted on fixed rail leg portion 274. An exit gate actuator 276 and control 277 may be mounted on fixed leg portion 274. Water bowls 250, 251 are mounted in an 16 enclosure 280 having a side wall 282 preventing access to the water bowl from the retaining pen 228 and a top wall 284 for mounting of the identification signal receiving 286, 288, Figure 11.

Figure 11 is a schematic representation of a pair of the afore described stalls 216, 217 with scale 248, 249, exit gate 246, 247, water bowl 250, 251, gate control and identification signal receiving 286, 288. Identification signal transmitting on an animal EID device are 21 illustrated at 300, 302. The identification signal receiver is packaged with a microprocessor and suitable interface as previously described and adjacent packages are interconnected by suitable transmission cable 304, 306.

Each interface unit is connected to an output cable 310, 312 from the associated scale; control interface devices 314, 316 which operate the gates; 110 volt A.C. power supply cables

1 318, 320; and microprocessor control units 330, 332 operated by 110 volt A.C. power through  
cables 334, 336. The microprocessor control units are connected in series or in parallel to central  
control 338 which is connected to central computer 340. The electronic and control devices of  
the system operate as previously described with reference to Figure 1.

Figure 12 discloses or depicts another embodiment of the present invention wherein a  
6 partition 600 is placed in a feedlot between the water 602 and the feed trough 604. The partition  
600 has multiple ports 606 spaced to make it easy for animals to gain access to the feed bunk  
604. The ports 606 are walk-through type ports and have closure bars so that after the animals  
are accustomed to going back and forth through ports without scales, the ports without scales can  
be closed off one at a time to direct the animals to use only a particular port, such as a port 606,  
11 provided with a scale 608 and one or more readers 610 to read the internal magnetic electronic  
identification bolus device showing the I.D. number of the animal, its temperature, and the  
weight. Additional readers 610 may be provided between other ports 606. The partition 600,  
which may be permanent or portable and may be comprised of separate partition elements or  
pieces, may be thought of as a barrier with a plurality of openings 606 for an animal to  
16 voluntarily walk through at least one of the openings whereby the animal passes a data collector  
adjacent to at the least one of the openings. It is anticipated that the animal will be carrying an  
electronic identification device, but analog measurements may be made in conjunction with  
electronic data collection or alone.

The partition panels 600 are fairly close to the feed bunk 609, whereby the animal goes  
21 through to eat and will leave once its had its fill. Because the animal is weighed both on the way  
in and out, the individual feed intake can be used to calculate feed conversion efficiency on each  
animal. Thus, cost calculations include the cost of each pound of gain in terms of feed. It also  
has the advantage of identifying the growth curve of each animal and identifying the optimum  
economical end point, temperature, ID, pH, etc.

1           Figure 13 depicts a modification for a stall for use in the present invention wherein a short stall 612 is provided extending out only about 18" from the water or feed trough 614 for each animal. A scale 616 may be provided. When the animals need to be sorted based on the data collected using the short stalls 612, the animals may be put in a pen and sorted in accordance with the present invention.

6           Figure 14 discloses another alternative embodiment of a pen and gate system for use in the present invention wherein a two-pen sort system is provided. The advantage of the depicted system is that it is possible to sort many animals with one sort gate 620 and by natural movement toward the feed bunk. Another embodiment of this type of system using bi-directional sort gates 622 is depicted in Figure 15. In this embodiment, cattle are sorted in a single sort stall into one  
11 or more pens and the bolus can be read on the way in or out of the pen. The embodiments of the system of the present invention depicted in Figures 12-14 comprise animal confinement and sorting structures which are formed from similar basic components, e.g., fencing, stalls, bars, pens, gates and the like, as the previously described embodiments.

          Another alternative embodiment of the present invention is depicted in Figures 16 and 17.

16          Figure 16 depicts an artificial insemination (AI) estrus cycle apron 630 for vasectomized bulls. The apron includes a neck attachment strap 632 and belly band 634 with a main apron portion 636 connected thereto and extending between the two straps. The main apron portion 636 fits on the breast of an animal, generally between its legs, but, in one embodiment, as depicted, the apron includes two leg holes 638 for accommodating the front legs of a bull, and a generally  
21 centrally mounted transmitter and receiver pocket recorder 640 with an associated pressure switch 642. The AI apron 630 is depicted in use in Figure 18 wherein a bull is depicted riding a cow. The cow carries the electronic bolus 100 of the present invention and the bull is wearing the AI apron 630. This embodiment of the present invention can provide the exact time of estrus recorded on each cow, and each time a bull jumps the cow the pressure switch turns the recorder

1 on to record the number of the bolus of the cow that is being ridden along with the time of day.  
This information can be then transmitted to a computer for printing out for the herd owner to  
identify which animals need to be bred and when.

Preferably, the animal-carried electronic identification device 100 (whether in the form of  
a bolus, tag or implant (not shown)) comprises a small size electronic chip-type device, an  
6 electrical circuit and an energy receiving antenna for operation only in response to energy  
transmitted thereto from an external source. The external energy source emanates from the  
identification signal receiver 103 and comprises electromagnetic energy.

In one embodiment of the invention, the condition of the animal is determined during a  
first occasion of in a stall and the condition signal is stored until the same animal is again  
11 identified during a second subsequent occasion in the stall. Then the selection control signal may  
be utilized to selectively direct the animal to a retaining area. It is to be understood that a  
selection control signal can be generated and utilized at any time by any means including manual  
entry at the microprocessor unit or the central computer by a computer operator.

The method of the present invention may include automatically correlating an animal  
16 identification signal and condition signal, comparing the condition of an animal with pre-  
established condition criteria and generating control signals for further processing of the animal  
including an animal separation control signal when the condition of the animal meets pre-  
established animal condition criteria.

The method of the present invention may include recording and storing data  
21 representative of the time when the animal enters a stall and the time when the animal leaves a  
stall; recording and storing data representative of the ambient temperature at the time when the  
animal is in the stall; recording and storing data representative of the amount of water drunk by  
the animal in the stall; and periodically printing a compilation of recorded data relating to the  
condition of each animal.

1        Although a description of preferred embodiments has been presented, various changes including those mentioned above could be made without deviating from the spirit of the present invention. It is desired, therefore, that reference be made to the appended claims rather than to the foregoing description to indicate the scope of the invention.

1

CLAIMS

What is claimed is:

1. A system for animal husbandry comprising:

an internal electronic identification device carried by an animal, said internal electronic  
6 identification device capable of emitting a signal;

an electronic reading device generally adjacent to the animal, said electronic reading  
device capable of reading the signal; and

a processing unit operably coupled to the reading device and programmed to receive and  
process the signal.

11 2. The system according to claim 1, wherein the internal electronic identification device further  
comprises a magnet.

3. The system according to claim 2, wherein the internal electronic identification device further  
comprises a sensor for sensing a characteristic of the animal.

4. The system according to claim 3, wherein the characteristic of the animal is a characteristic  
16 selected from the group consisting of temperature, pH and location of the animal.

5. The system according to claim 1, wherein the internal electronic identification device further  
comprises a dispenser for delivering a substance to the animal.

6. The system according to claim 5, wherein the substance delivered to the animal is a  
medication.

21 7. The system according to claim 6, wherein the medication is selected from the group  
consisting of antibiotics and growth hormones.

8. The system according to claim 2, wherein the internal electronic identification device further  
comprises a dispenser for delivering a substance to the animal, said dispenser comprising a  
magnetically susceptible portion.



1 9. The system according to claim 8, wherein the internal electronic identification device further comprises a sensor for sensing a characteristic of the animal, wherein the characteristic is selected from the group consisting of temperature, pH and location of the animal.

10. The system according to claim 9, further comprising a scale.

11. The system according to claim 10, further comprising a stall, said scale adjacent to the stall.

6 12. The system according to claim 11, wherein the processing unit receives the signal from the reading device and compares a more recent signal to a previous signal.

13. The system according to claim 12, wherein the stall has a gate, said system further comprising a controller operably coupled to the processing unit for controlling the gate for enabling control of the animal.

11 14. An electronic identification device for an animal comprising:

a permanent magnet;

a transponder chip;

at least one read only memory containing information of said animal carried by said transponder chip;

16 an antenna connected to said transponder chip for transmitting said information when said transponder is excited, said antenna comprising a plurality of wire windings around said magnet; and

a magnetically susceptible member for providing a substance to the animal.

15. The device according to claim 14, further comprising a reader for exciting said at least one transponder and reading said information.

21 16. A method of automatically monitoring a physical condition of an animal comprising:

providing an identification signal sending device for the animal;

providing a stall;

1 causing an identification signal to be automatically generated from said identification  
signal device of the animal while the animal is in the stall;

determining a condition of the animal while the animal is in the stall and generating a  
condition signal representative of the condition of the animal;

correlating the identification signal with the condition signal and automatically  
6 comparing the condition of the animal with predetermined criteria to provide a selection control  
signal for the animal;

treating the animal in response to the selection control signal..

17. The method of claim 16, wherein the identification signal device is internal to the animal.

18. The method of claim 17, wherein the identification signal device is magnetic and provides

11 for dispensing a substance to the animal.

19. A bolus for oral administration to a ruminant animal and for retention in the rumen or  
reticulum of the animal, comprising:

an integrated circuit;

a capacitor;

16 a core;

a bobbin having an internal dimension sized to fit over said core; and

a coil antenna helically wrapped about said bobbin and electrically connected to said  
integrated circuit and capacitor to form an inductive-capacitance circuit.

20. The transponder of claim 19, wherein said coil antenna is fixedly mounted on said core in a  
21 position whereby said inductive-capacitance circuit forms a tuned circuit.

21. A bolus for oral administration to a ruminant animal and for retention in the rumen or  
reticulum of the animal, comprising a magnet and a substance carrier.

22. The bolus of claim 21, wherein carrier includes at least one magnetically susceptible portion.

23. An animal confinement structure for determining feed conversion efficiency comprising;

- 1 a barrier with a plurality of openings for an animal to voluntarily walk through; and  
a data collector adjacent to at least one of the openings.



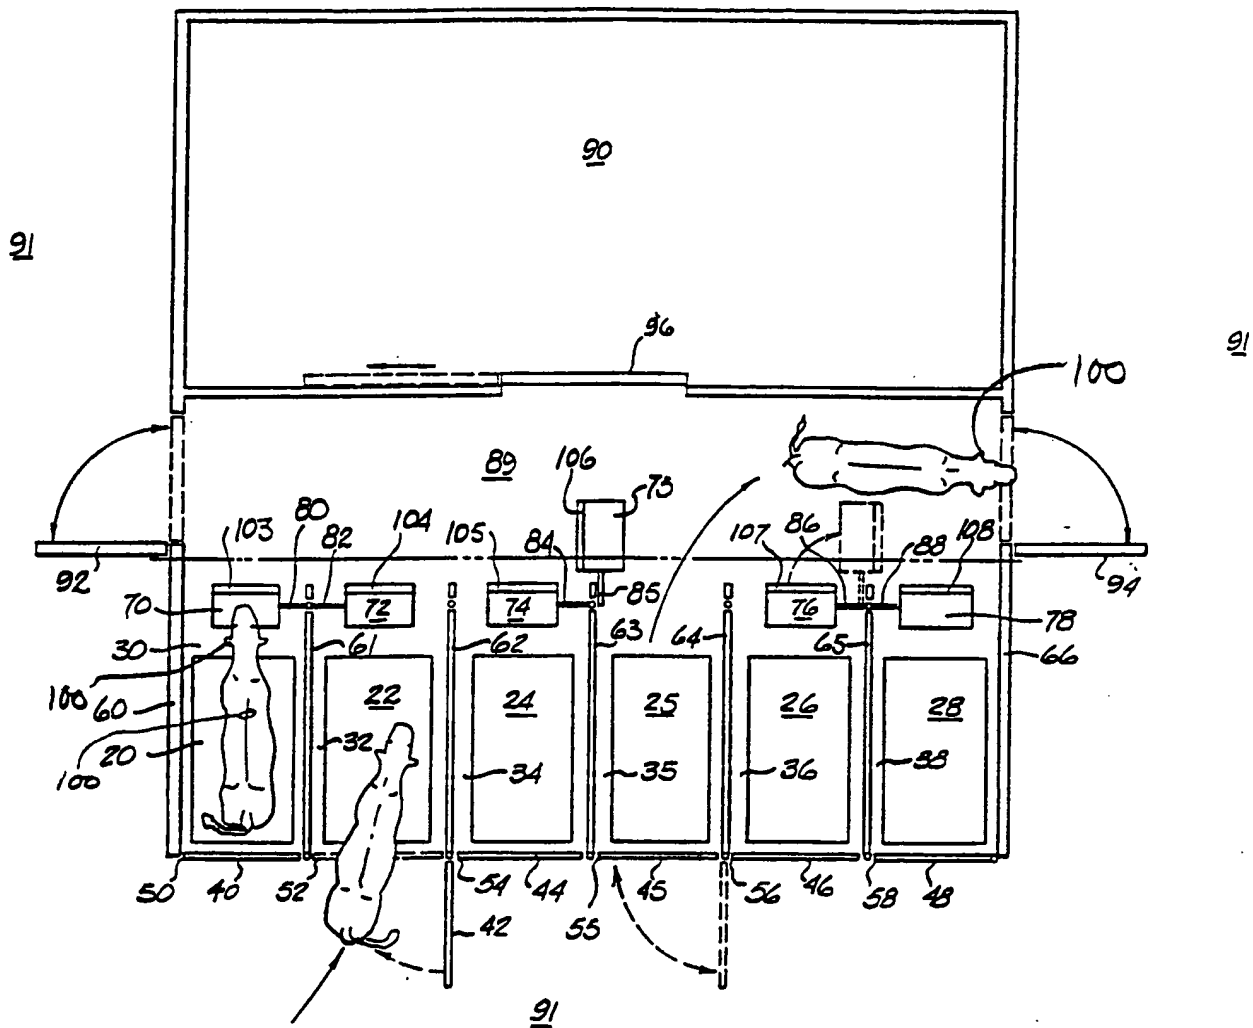


Figure 1

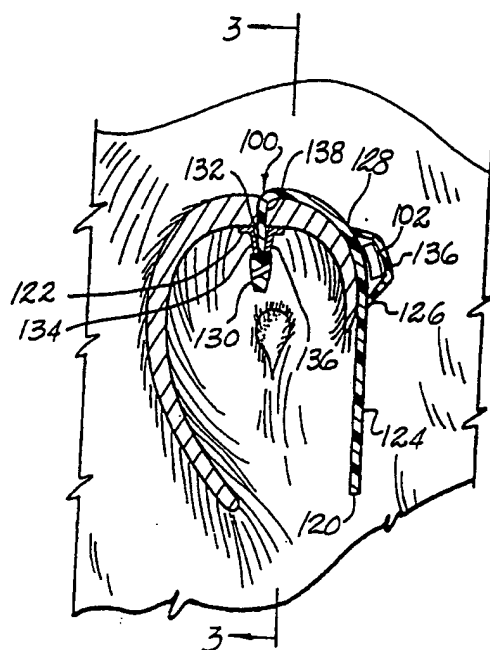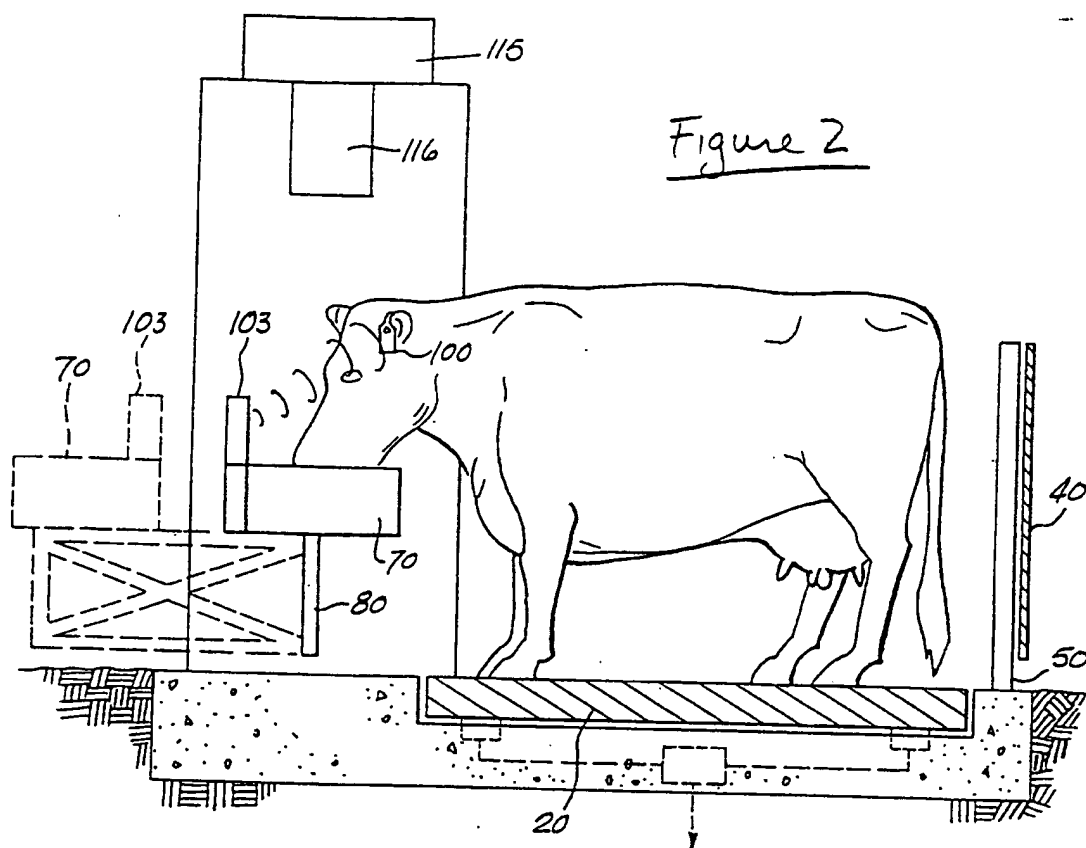

3/15

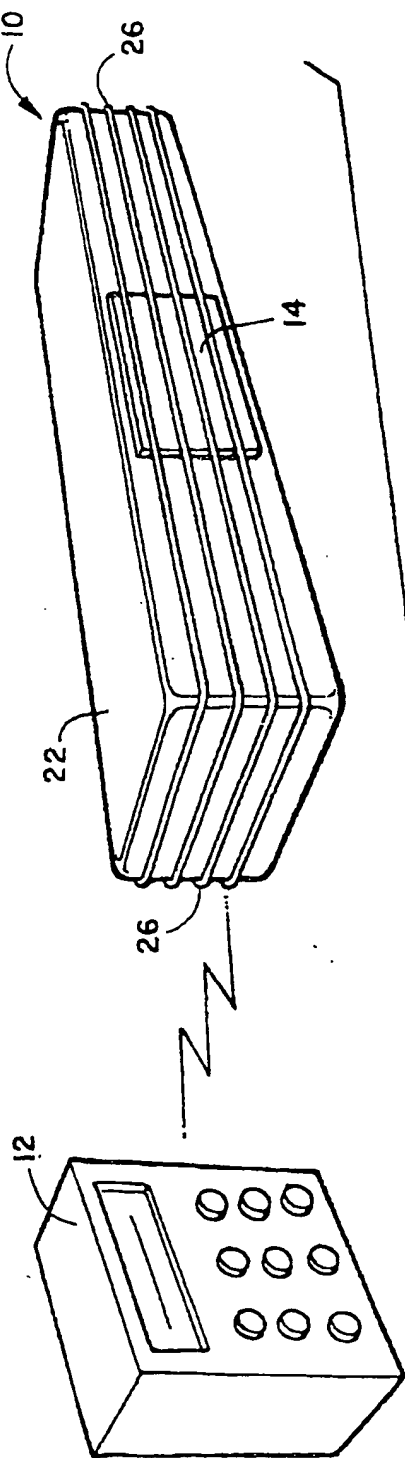


FIGURE 4

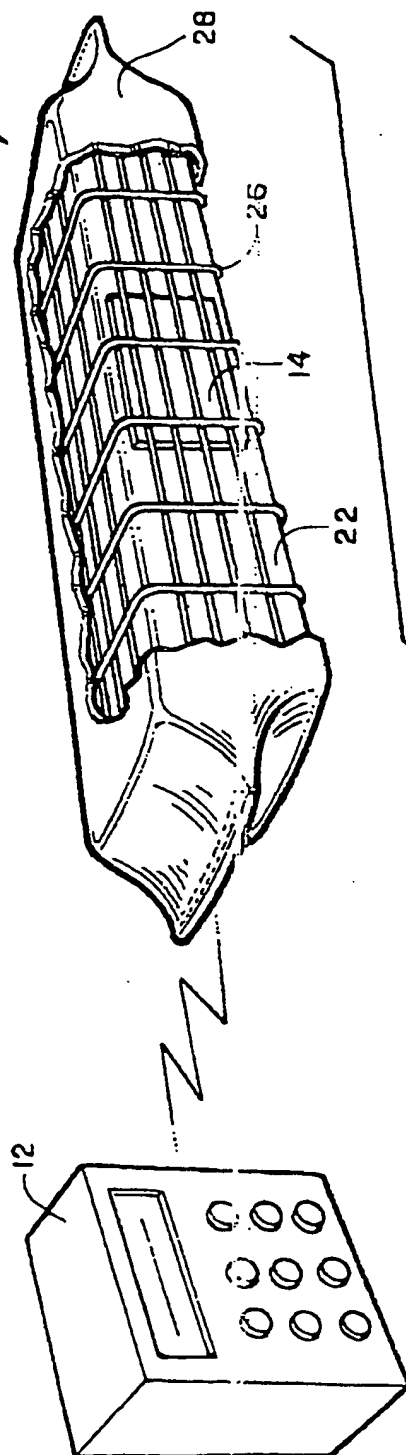


FIGURE 5

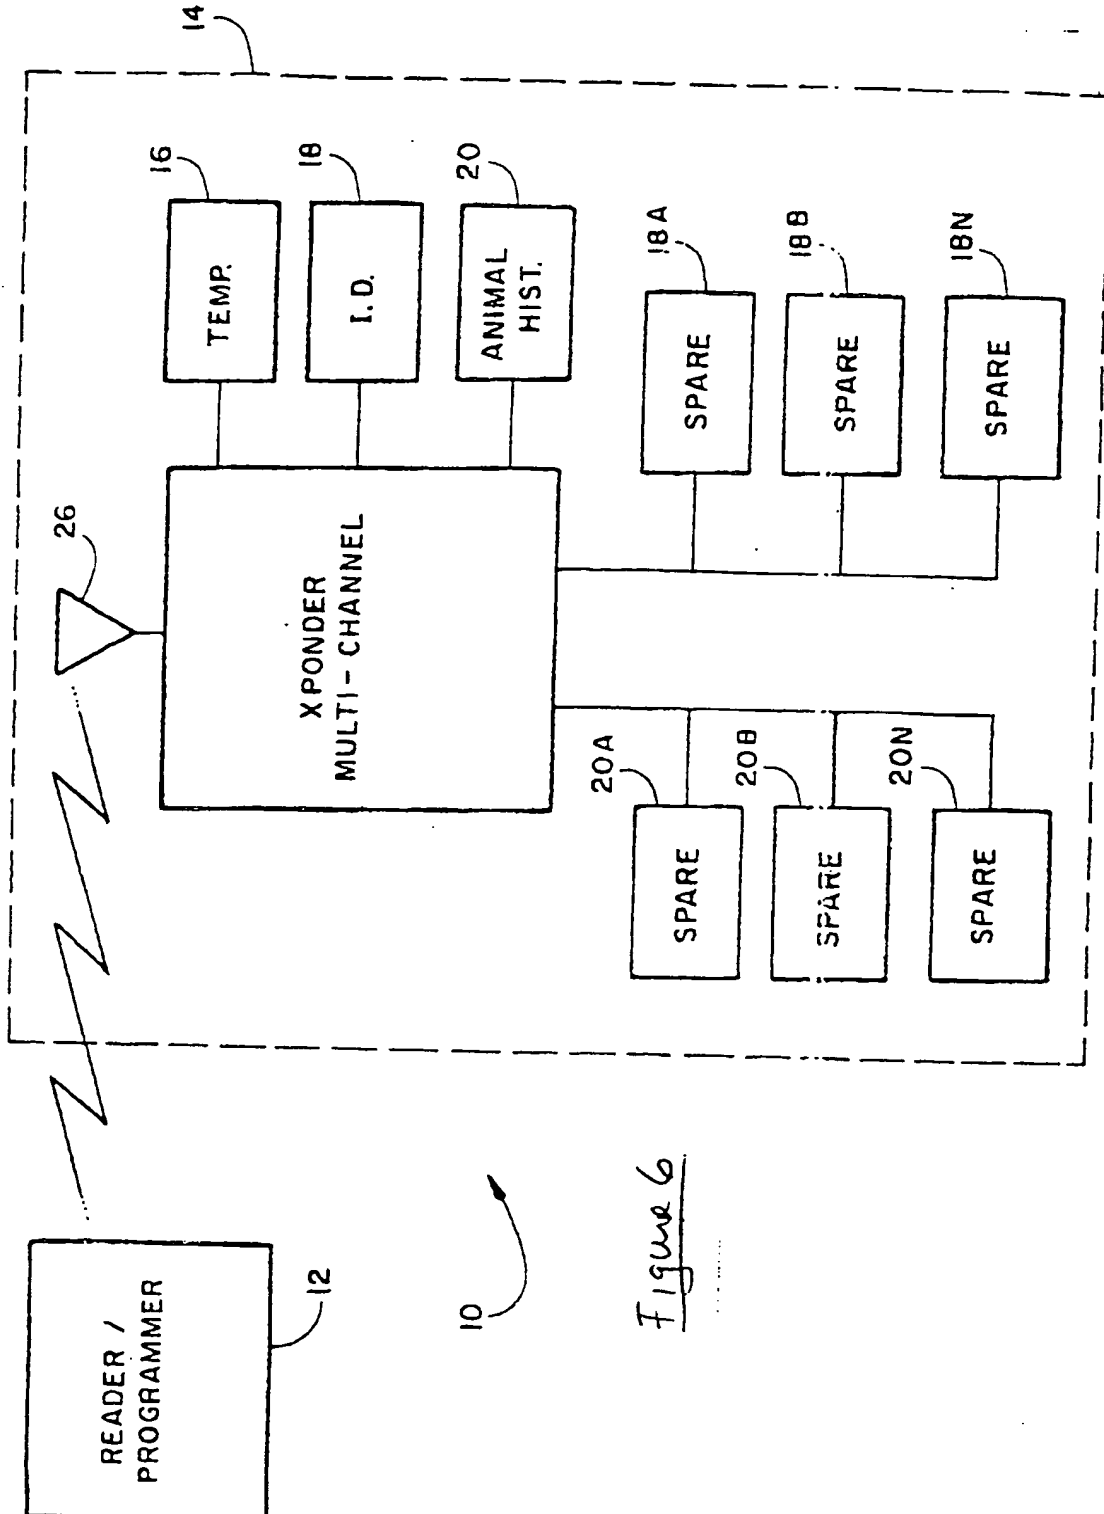


Figure 6

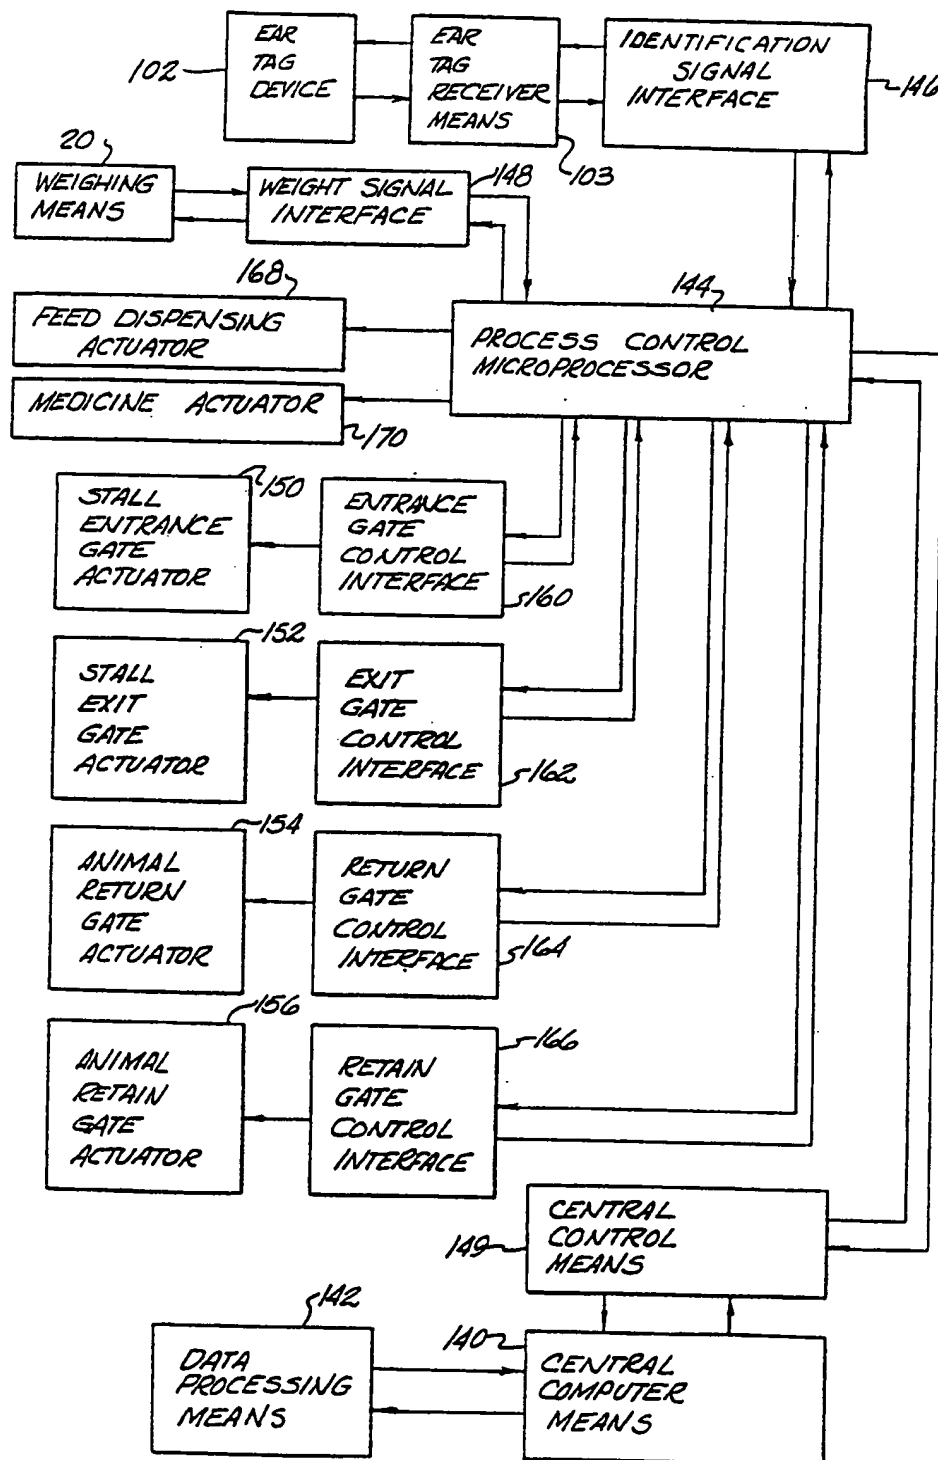
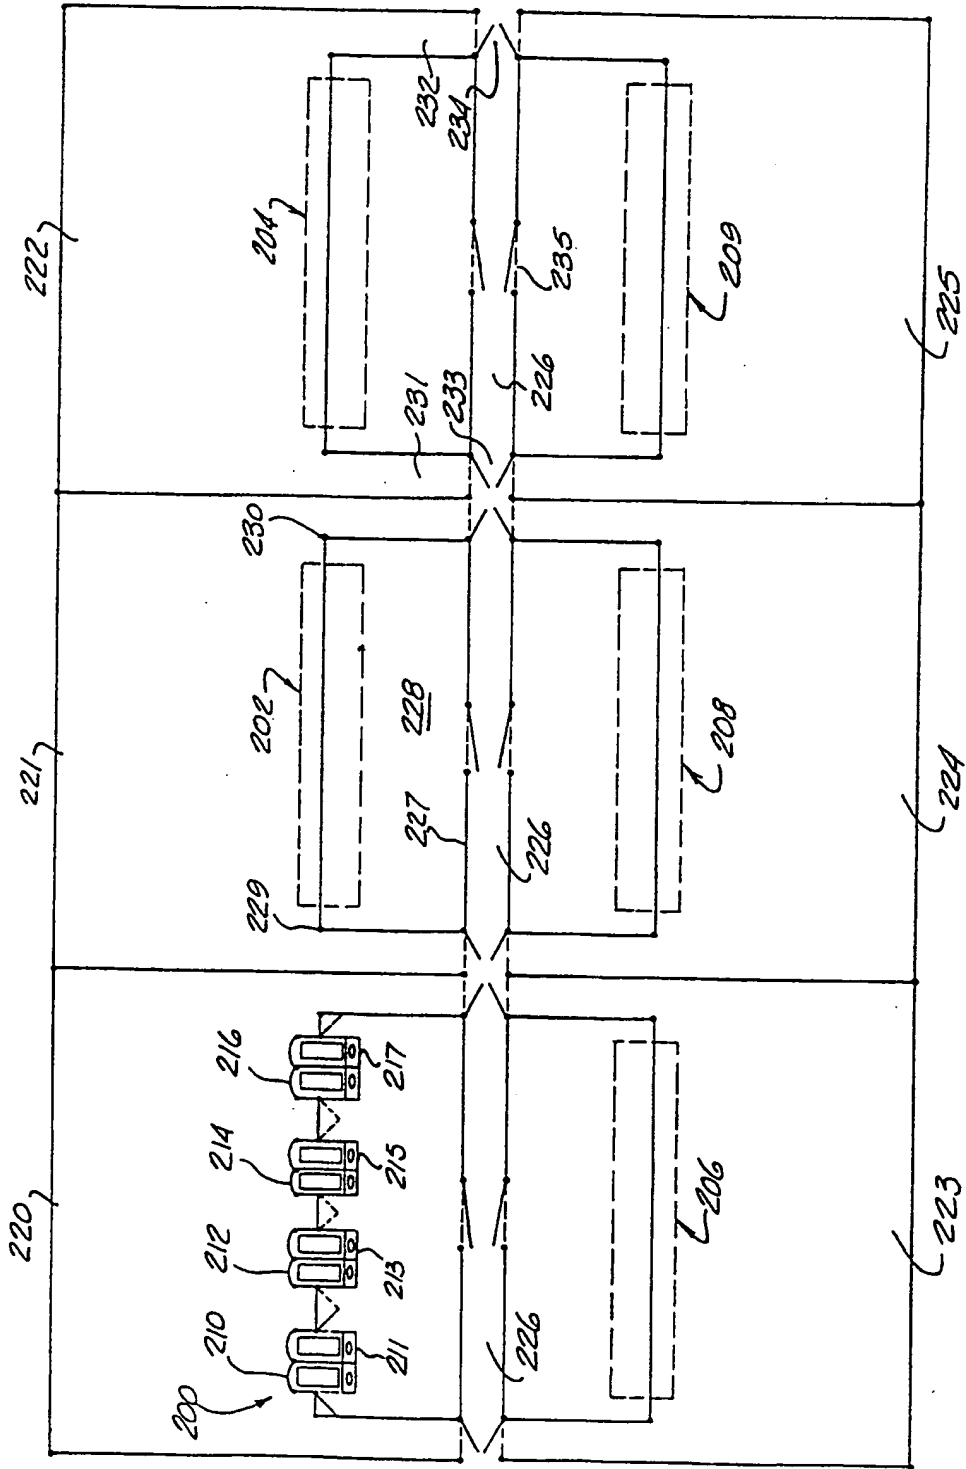




Figure 8



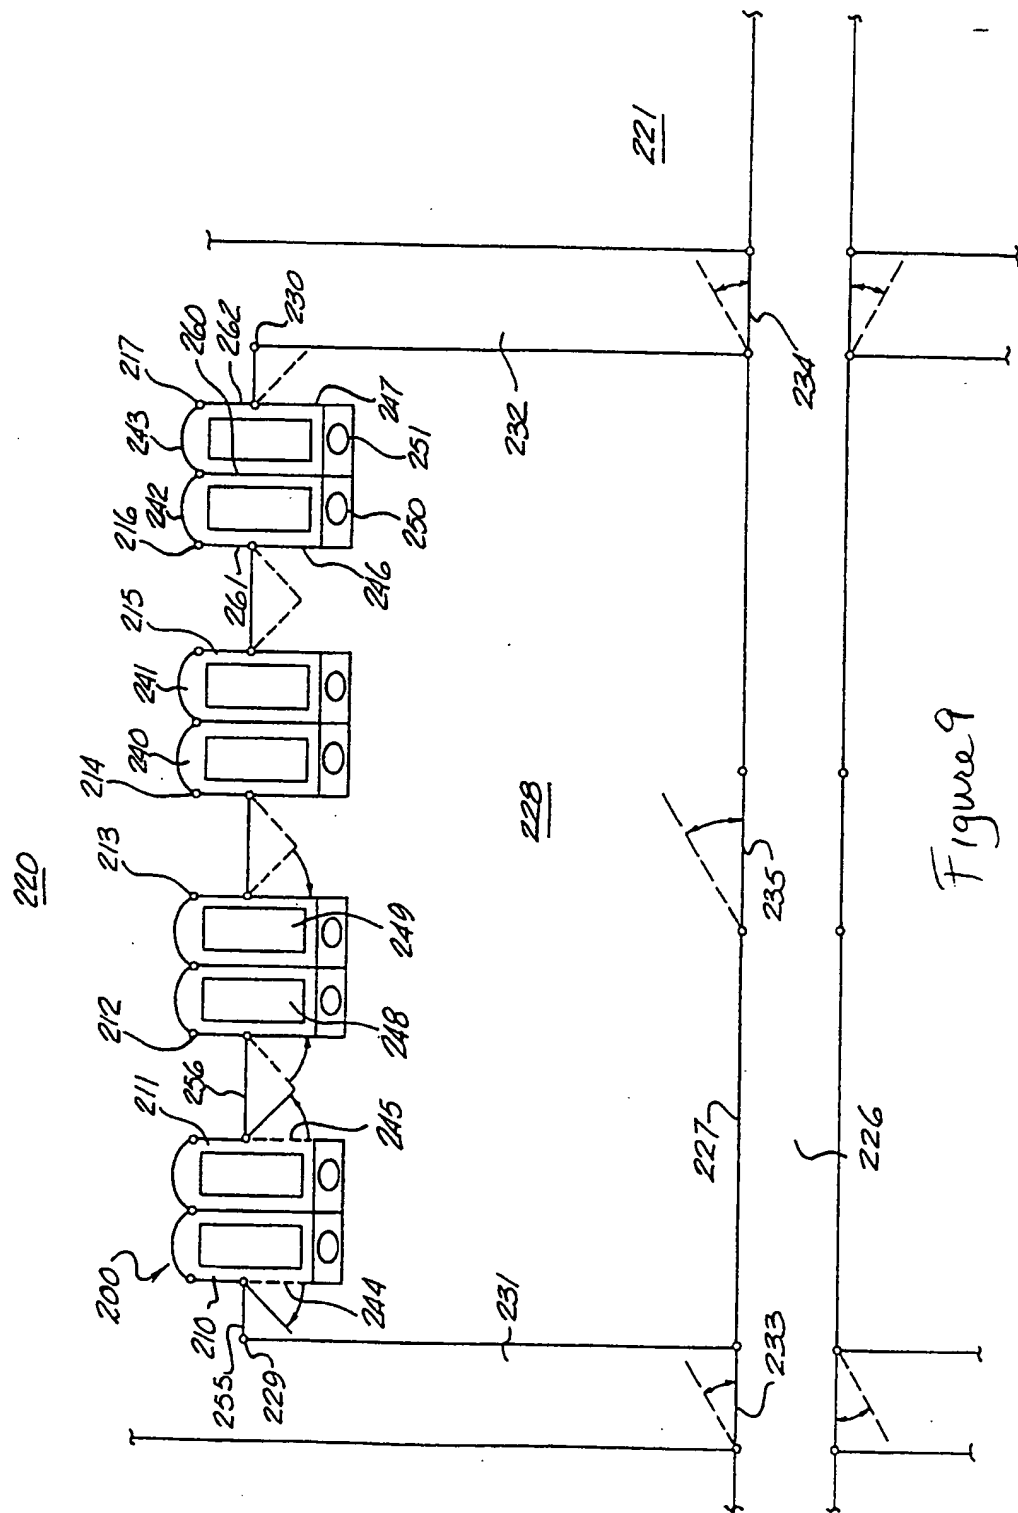


Figure 9

Figure 10

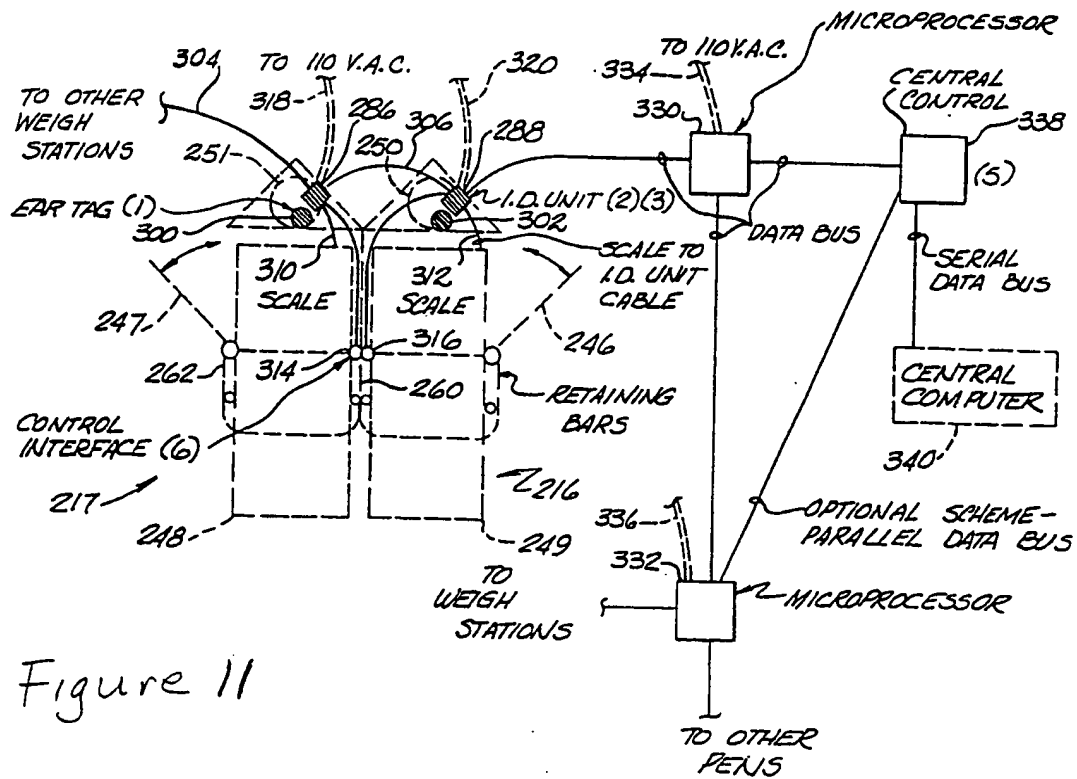
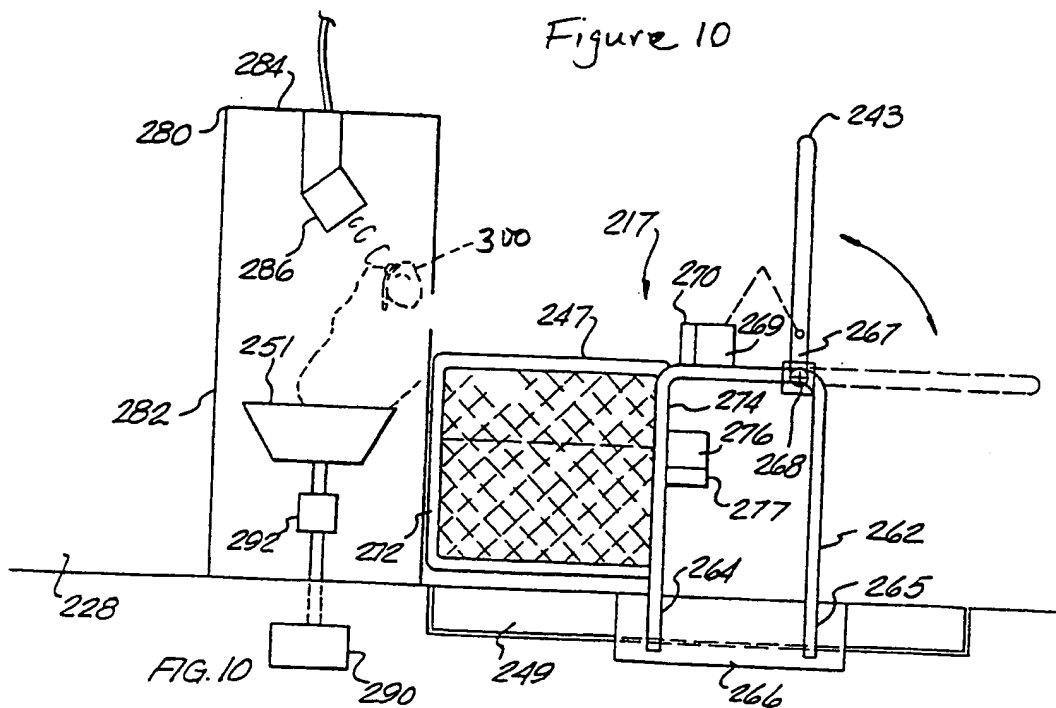


Figure 11

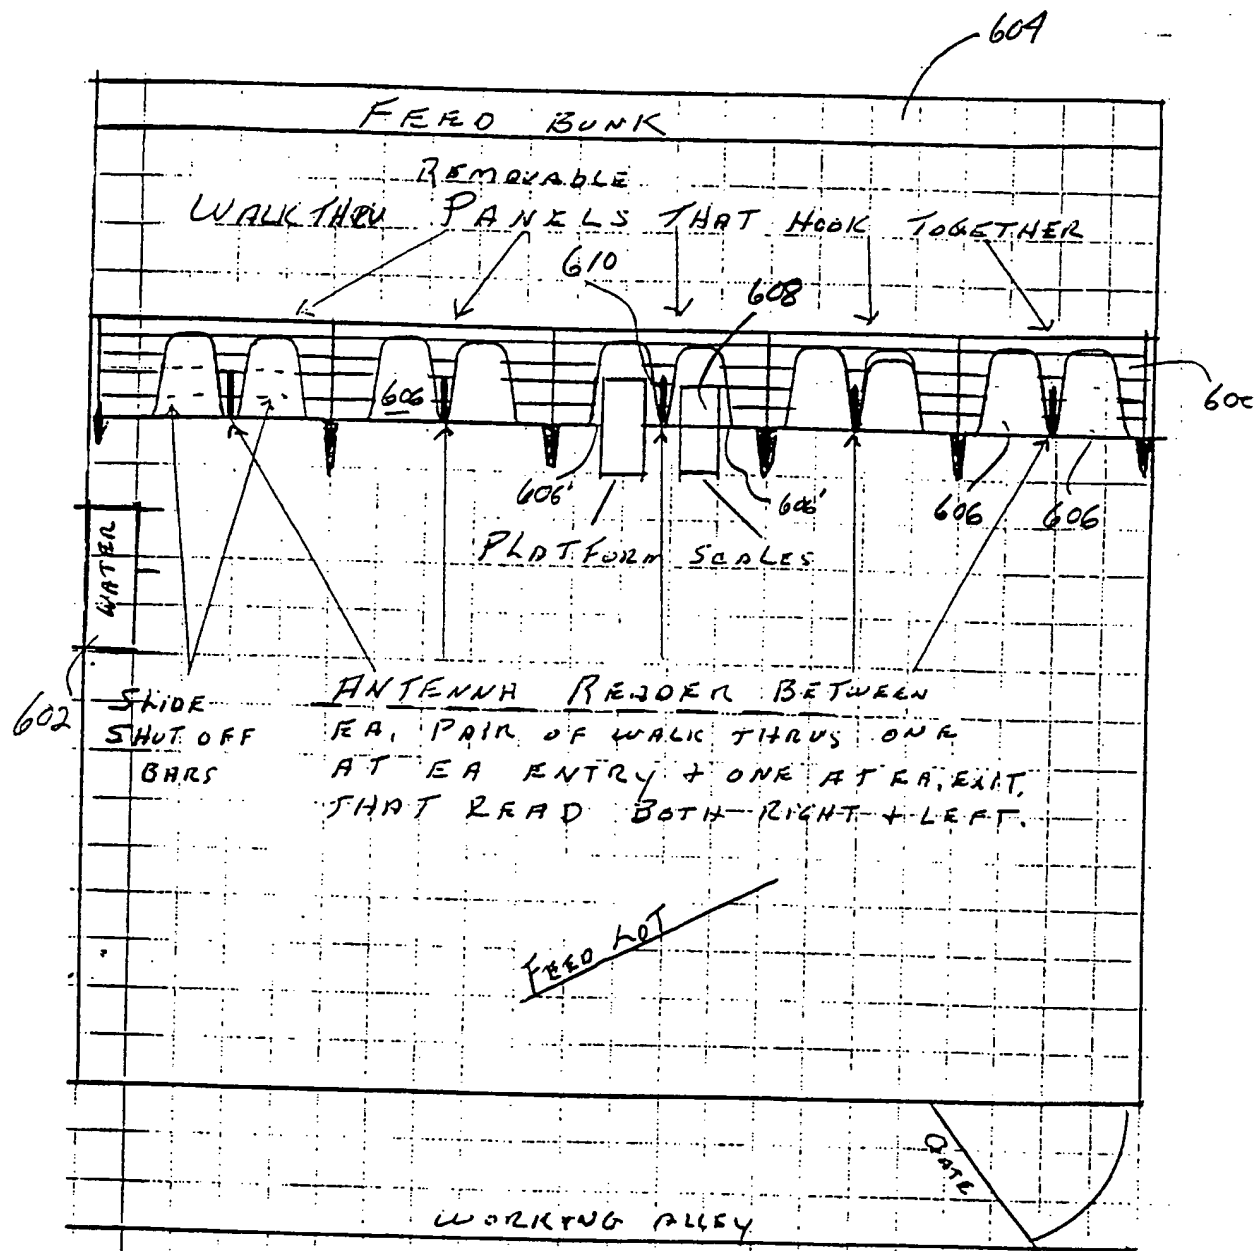


Figure 12


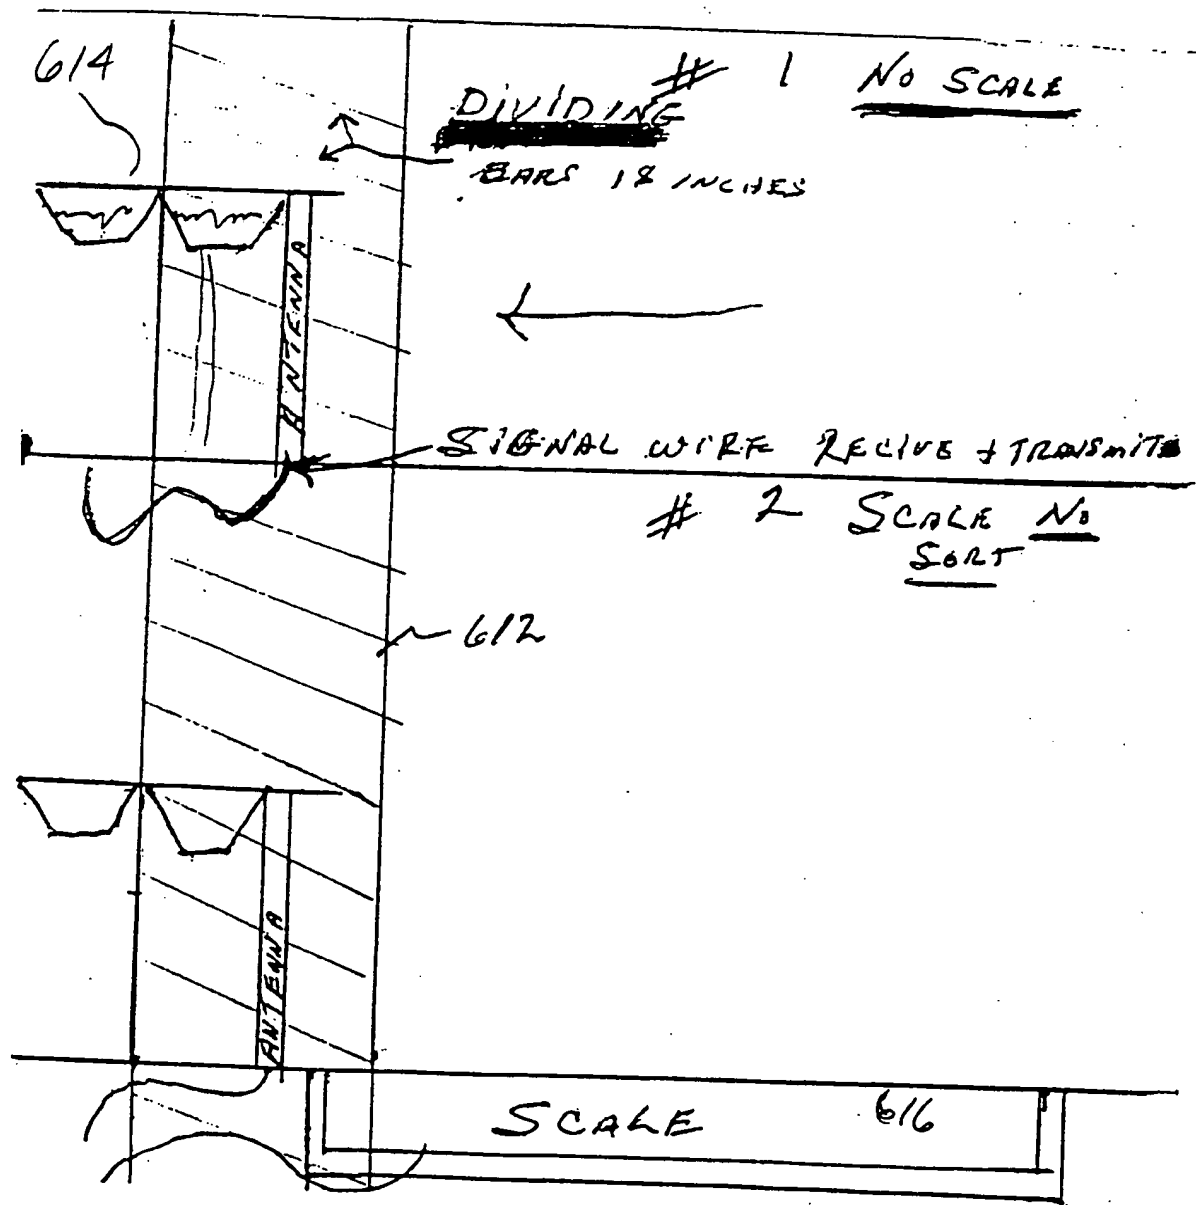


Figure 13

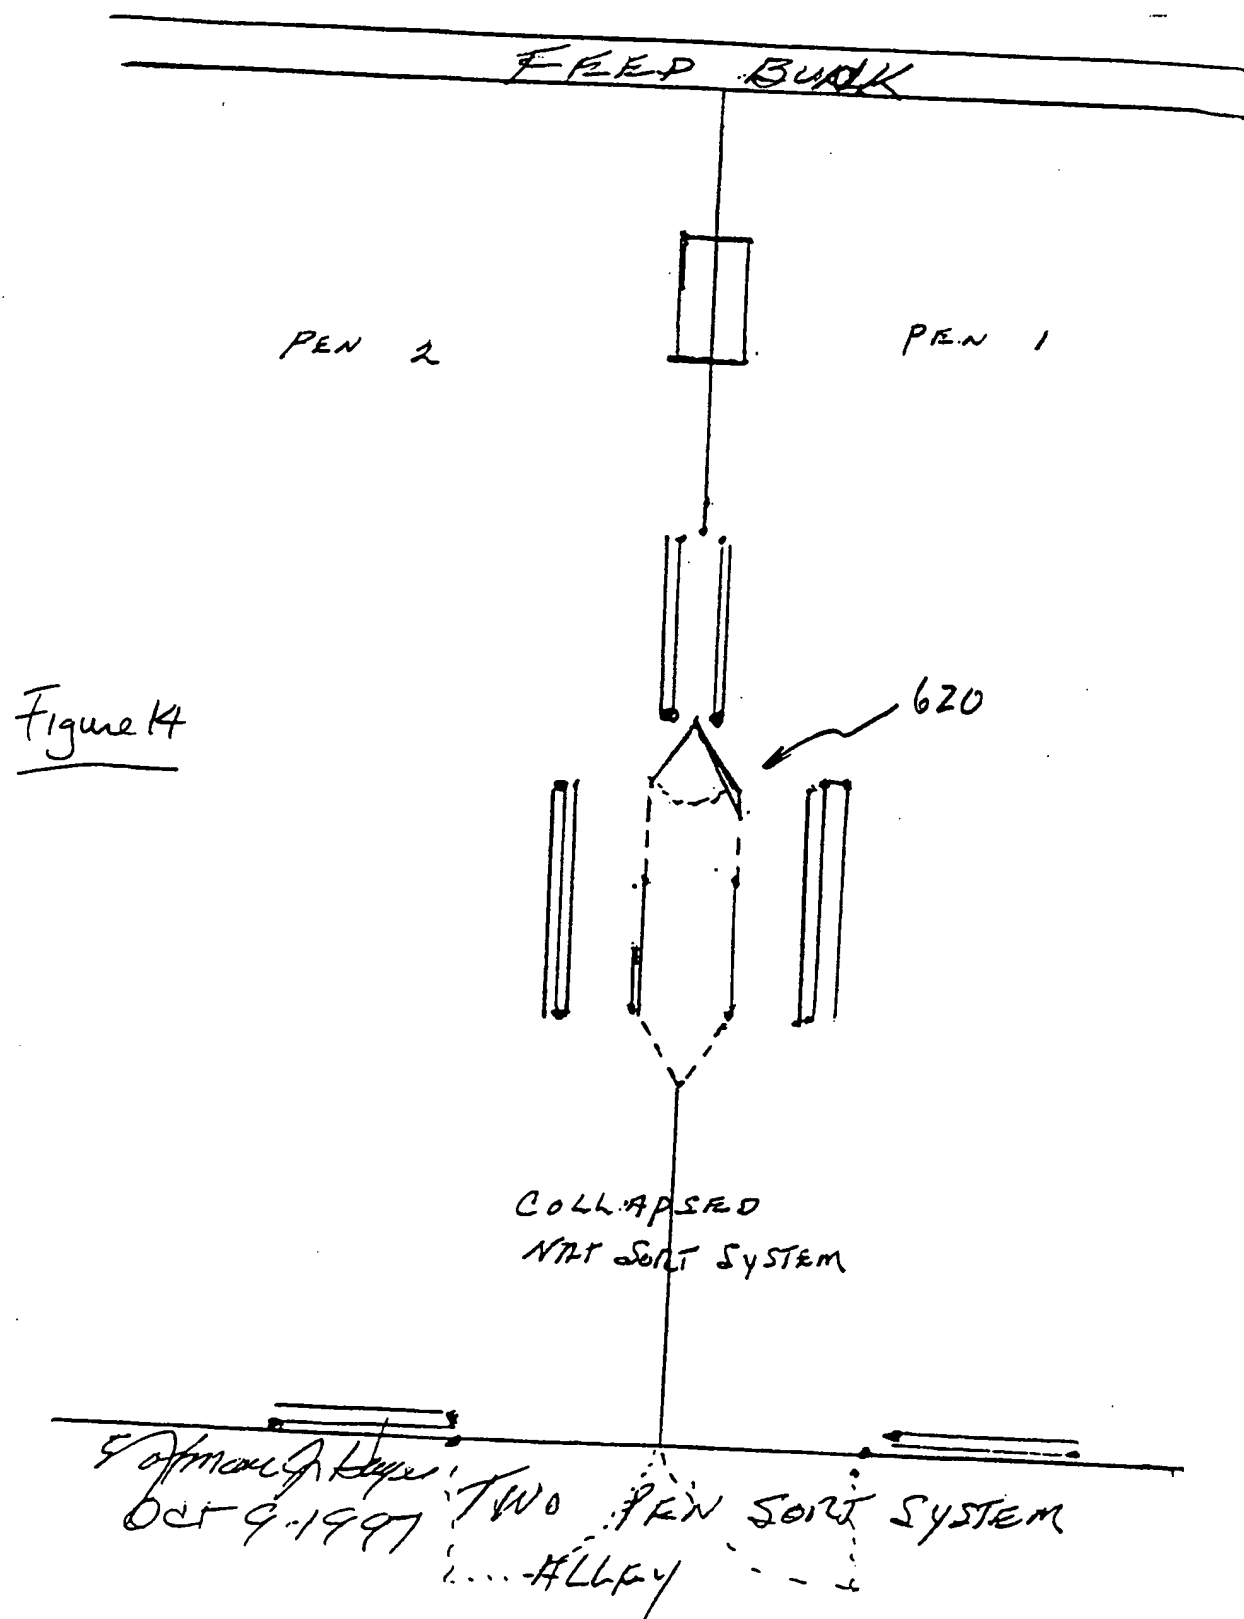

12/15



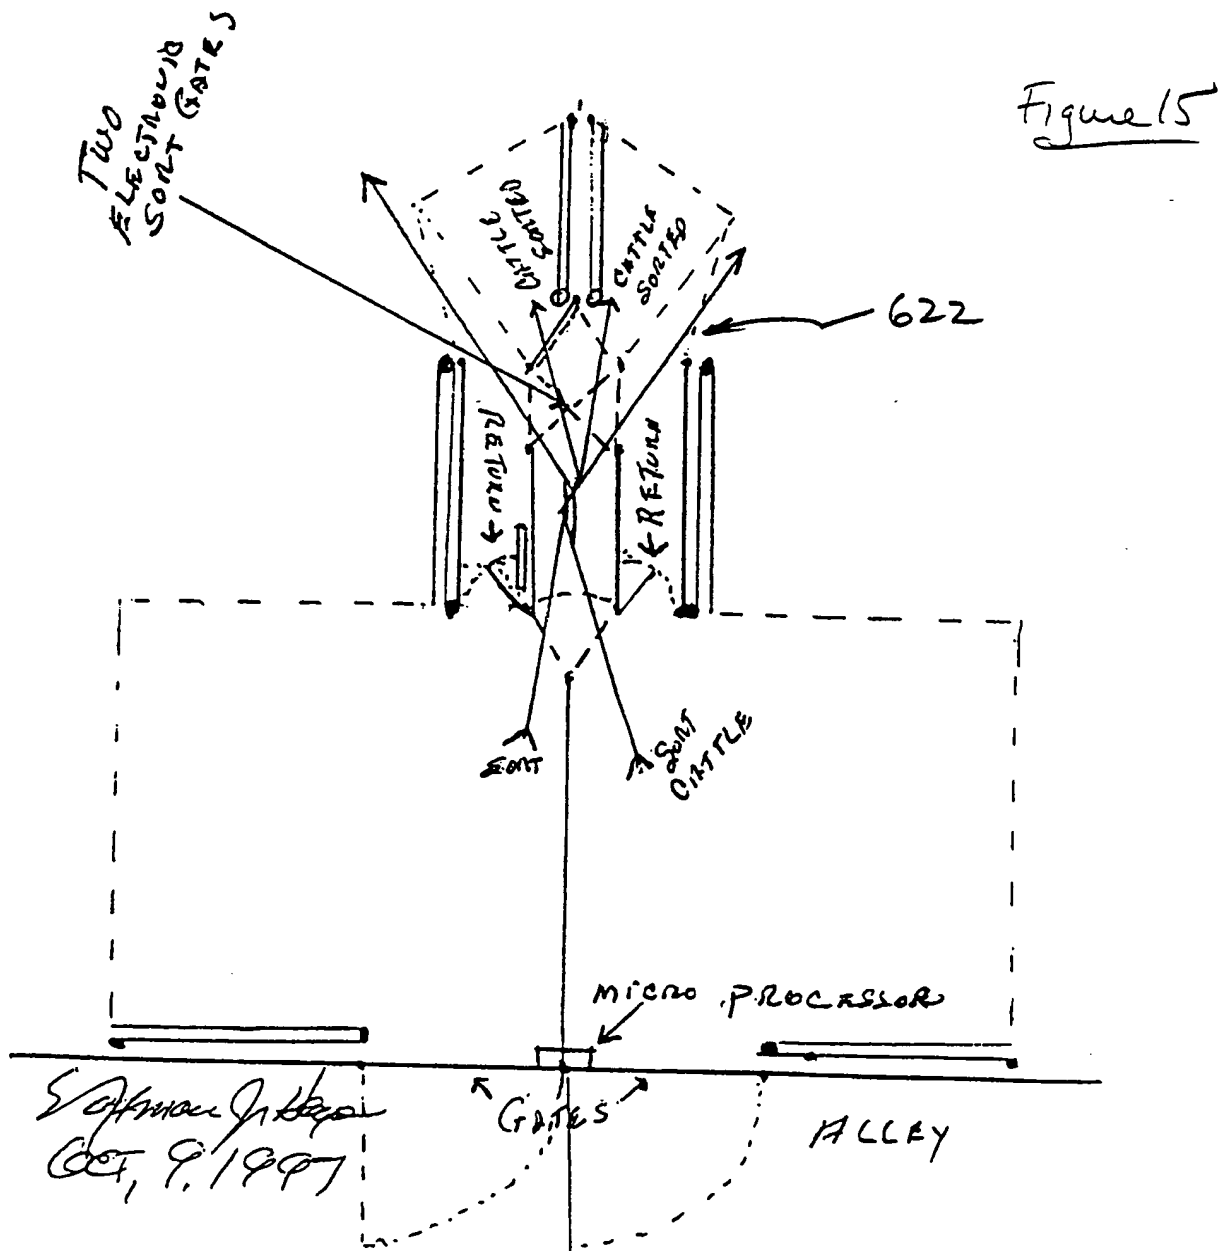


Figure 16

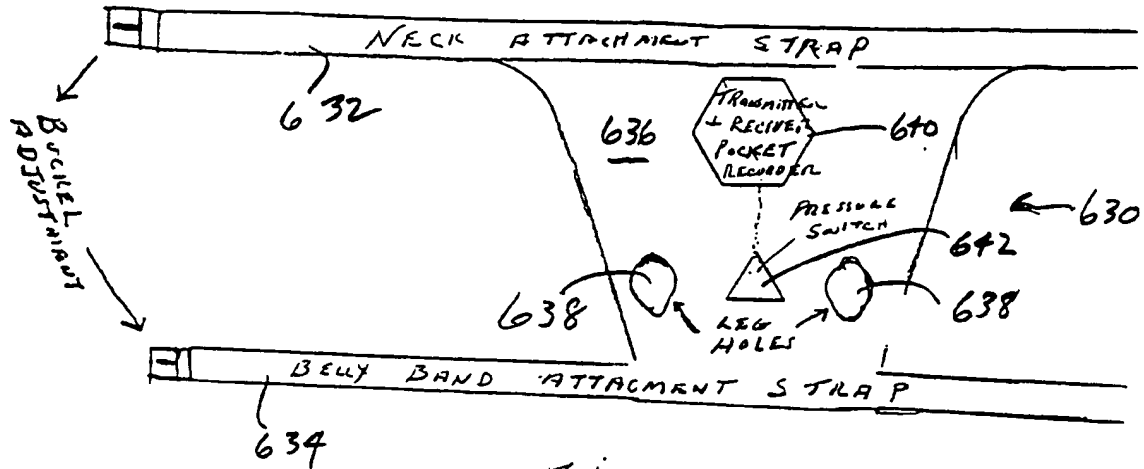

A.I. APRON FOR  
VASECTOMIZED BULL

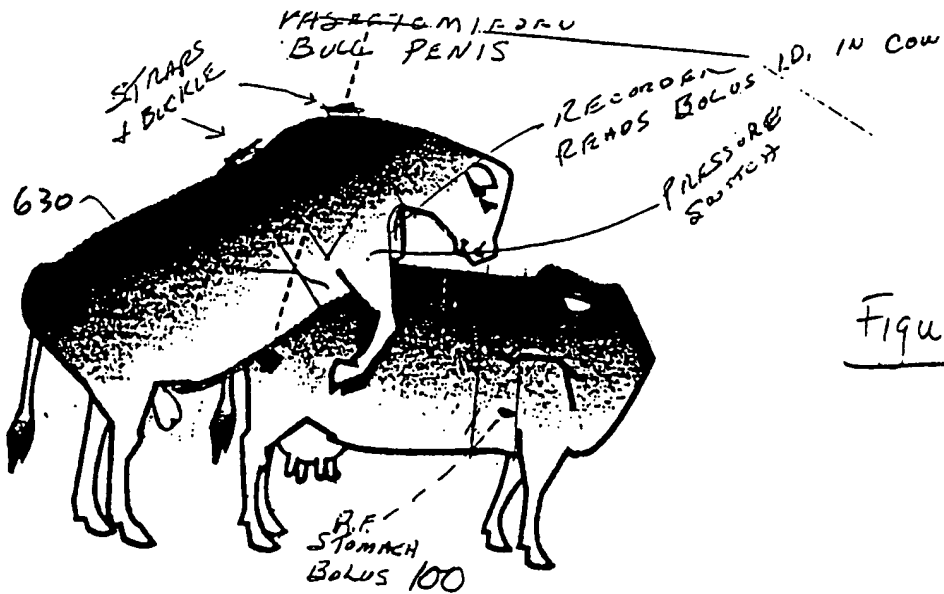
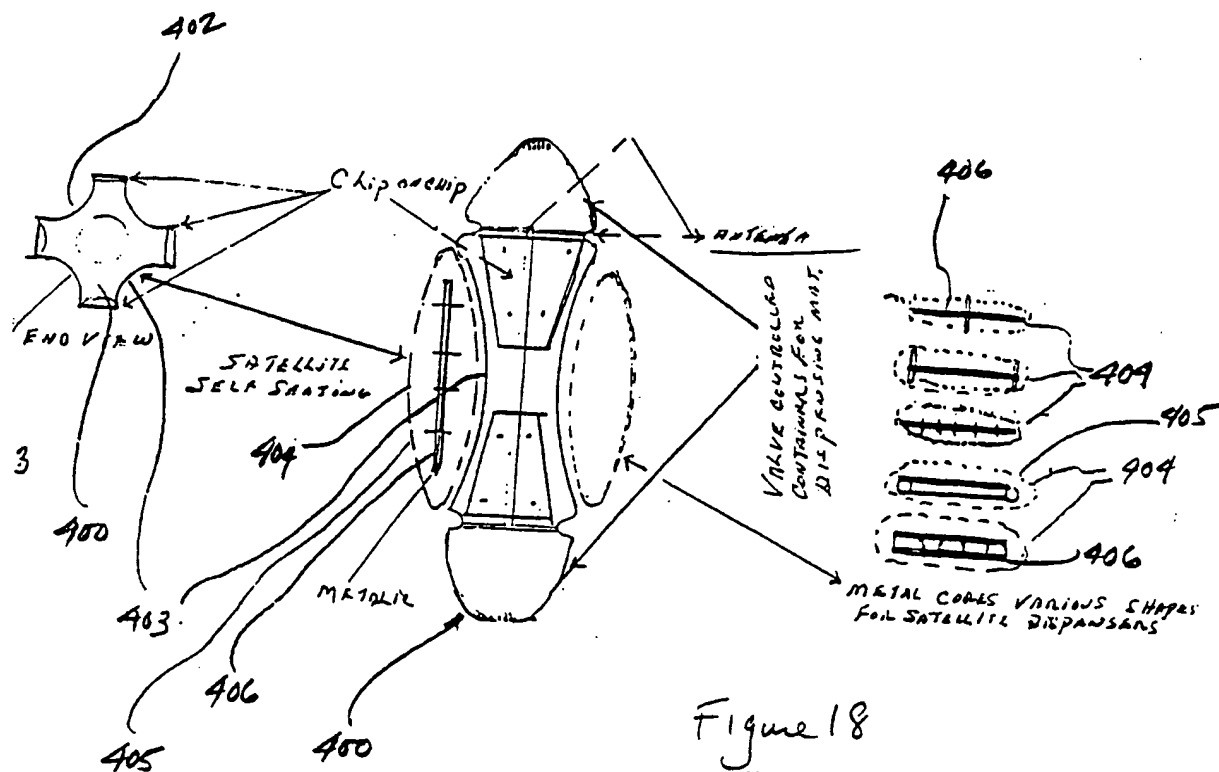


Figure 17





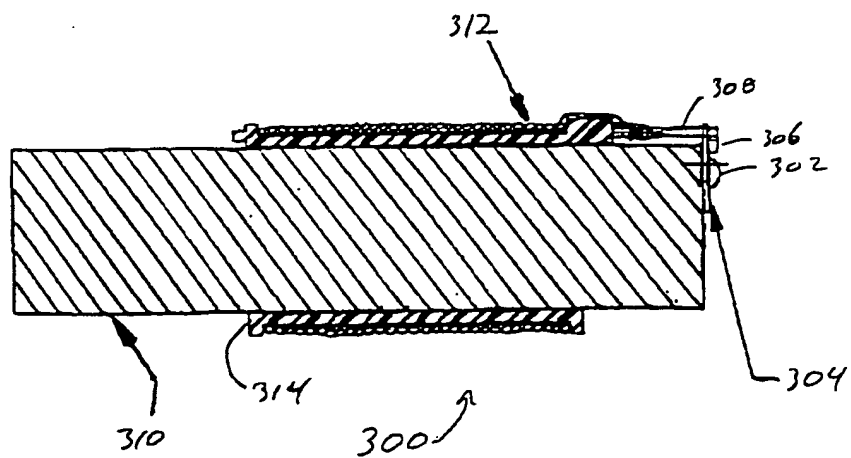


Figure 19

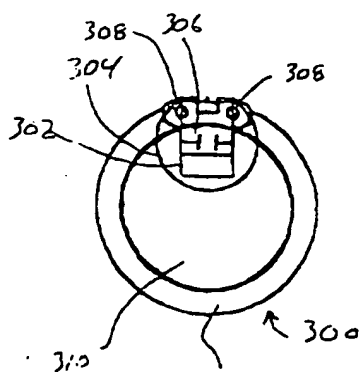



Figure 20

## INTERNATIONAL SEARCH REPORT

 International application No.  
 PCT/US98/07916

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC(6) : A01K 29/00 US CL : 119/174 According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) U.S. : 119/174, 51.02, 436, 502, 518, 842 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,322,034 A (WILLHAM et al.) 21 June 1994 (21.06.94), col. 6, lines 7-40.	1-4, 14, 15
X	US 4,617,876 A (HAYES) 21 October 1986 (21.10.86), col. 4, lines 40-68.	16-18
X	US 5,482,008 A (STAFFORD et al.) 09 January 1996 (09.01.96), col. 5, lines 40-64.	19-22
X	US 4,463,353 A (KUZARA) 31 July 1984 (31.07.84), col. 5, lines 25-52.	23
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family	
Date of the actual completion of the international search 17 JUNE 1998		Date of mailing of the international search report 13 JUL 1998
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer <i>for</i>  ROBERT P. SWIATEK Telephone No. (703) 308-2700